FEATURES


* Isolation voltage between input and output V_{iso} : $5,000V_{rms}$
* 6pin DIP photocoupler, triac driver output
* High repetitive peak off-state voltage V_{DRM} : Min. 600V
* High critical rate of rise of off-state voltage
  (dv/dt : MIN. 1000V / μs)
* Dual-in-line package :
  MOC3052
* Wide lead spacing package :
  MOC3052M
* Surface mounting package :
  MOC3052S
* Tape and reel packaging :
  MOC3052S-TA1
* UL approved (No. E113898)
* CSA approved (No. CA91533-1)
* FIMKO approved (No. 15469)
* NEMKO approved (No. P00102123)
* DEMKO approved (No. 309968-01)
* SEMKO approved (No. 0032019/01-11)
* VDE approved (No. 094722)

APPLICATION


* Incandescent Lamp Dimmers
* Interfacing Microprocessors to 115 and 240 Vac Peripherals
* Lamp Ballasts
* Motor Controls
* Solid State Relays
* Static AC Power Switch
* Solenoid / Valve Controls
* Temperature Controls

OUTLINE DIMENSIONS

Dual-in-line package :

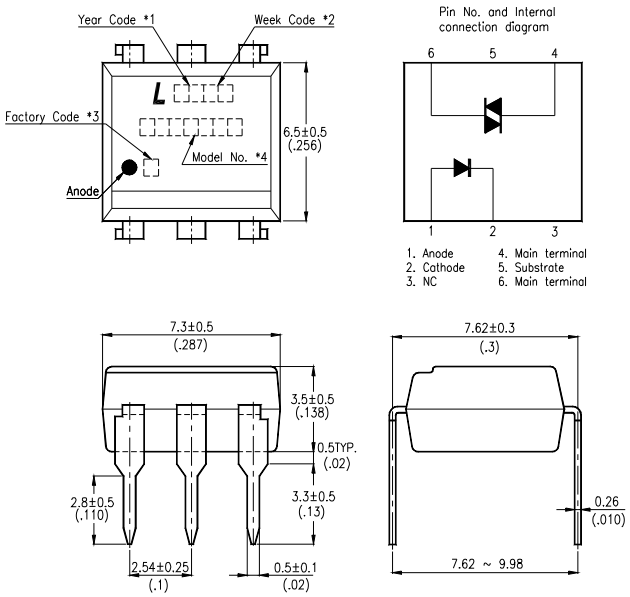


Wide lead spacing package:

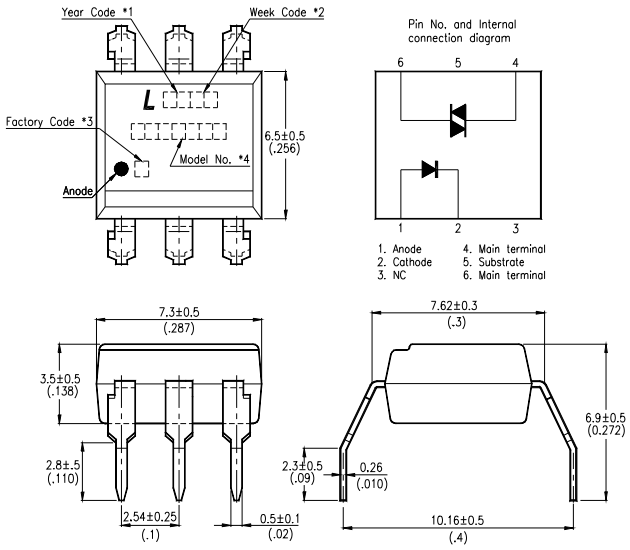

*1. Year date code.
*2. 2-digit work week.
*3. Factory identification mark shall be marked (Z : Taiwan, Y : Thailand).
*4. Model No.: MOC3052

OUTLINE DIMENSIONS


Surface mounting package :

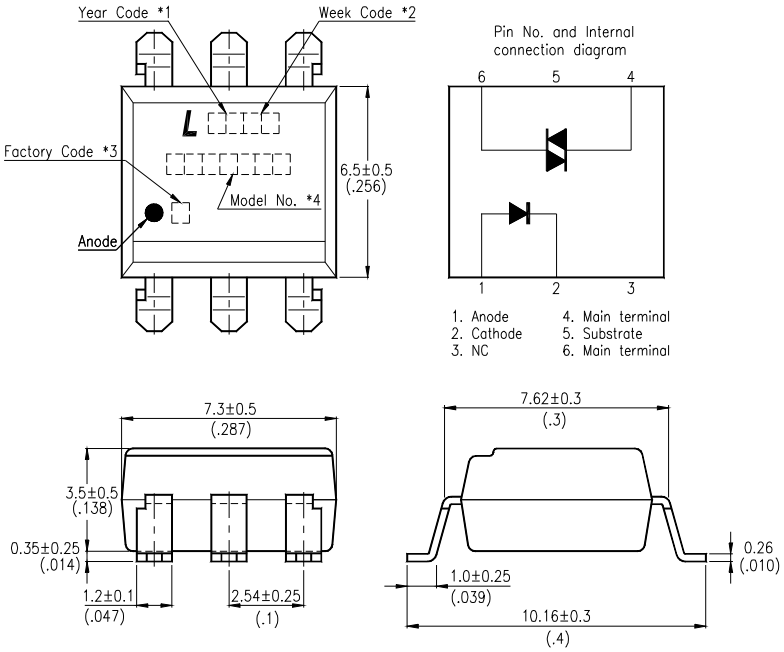

*1. Year date code.
*2. 2-digit work week.
*3. Factory identification mark shall be marked (Z : Taiwan, Y : Thailand).
*4. Model No.: MOC3052

TAPING DIMENSIONS

Tape and reel package :
MOC3052S-TA1

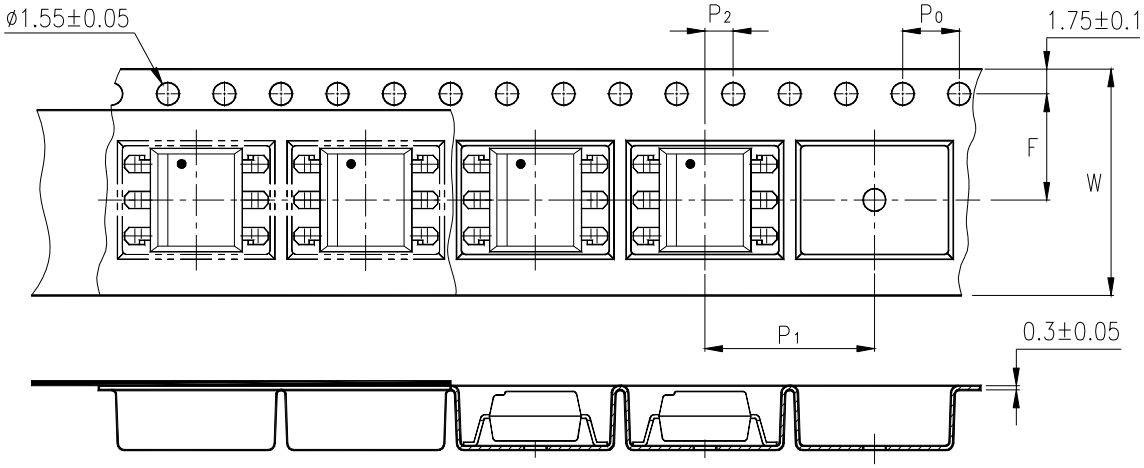

Description	Symbol	Dimensions in mm (inches)
Tape wide	W	16 ± 0.3 (.63)
Pitch of sprocket holes	P_0	4 ± 0.1 (.15)
Distance of compartment	F P_2	7.5 ± 0.1 (.295) 2 ± 0.1 (.079)
Distance of compartment to compartment	P_1	12 ± 0.1 (.472)

ABSOLUTE MAXIMUM RATING

(Ta = 25°C)

PARAMETER		SYMBOL	RATING	UNIT
INPUT	Forward Current	I_F	50	mA
	Reverse Voltage	V_R	6	V
	Power Dissipation	P_D	100	mW
OUTPUT	Off-State Output Terminal Voltage	V_{DRM}	600	V
	Peak Repetitive Surge Current (PW=100μs, 120pps)	I_{TSM}	1	A
	Collector Power Dissipation	P_C	300	mW
Total Power Dissipation		P_{tot}	330	mW
*1 Isolation Voltage		V_{iso}	5,000	Vrms
Ambient Operating Temperature Range		T_A	-40 ~ +100	°C
Storage Temperature Range		T_{stg}	-55 ~ +150	°C
*2 Soldering Temperature		T_L	260	°C

*1. AC For 1 Minute, R.H. = 40 ~ 60%

Isolation voltage shall be measured using the following method.

(1) Short between anode and cathode on the primary side and between collector, emitter on the secondary side.

(2) The isolation voltage tester with zero-cross circuit shall be used.

(3) The waveform of applied voltage shall be a sine wave.

*2. For 10 Seconds

ELECTRICAL - OPTICAL CHARACTERISTICS

(Ta = 25°C)

PARAMETER		SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
INPUT	Forward Voltage	V_F	—	1.2	1.4	V	I_F=20mA
	Reverse Current	I_R	—	0.05	10	μA	V_R=6V
OUTPUT	*1 Peak Blocking Current, Either Direction	I_{DRM}	—	—	100	nA	V_{DRM} = 600V
	Peak On-State Voltage, Either Direction	V_{TM}	—	—	3.0	V	I_{TM}=100 mA Peak
	*2 Critical rate of Rise of Off-State Voltage	dv/dt	1000	—	—	V/μs	
COUPLED	*3 Led Trigger Current, Current Required to Latch Output, Either Direction	I_{FT}	—	—	10	mA	Main Terminal Voltage = 3V
	Holding Current, Either Direction	I_H	—	400	—	μA	

*1 Test voltage must be applied within dv/dt rating.
*2 This is static dv/dt. Commutating dv/dt is a function of the load-driving thyristor(s) only.
*3 All devices are guaranteed to trigger at an I_F value less than or equal to max I_{FT}. Therefore, recommended operating I_F lies between max 10mA for MOC3052 and absolute max I_F (50mA)

CHARACTERISTICS CURVES

Fig.1 Forward Current vs. Ambient Temperature

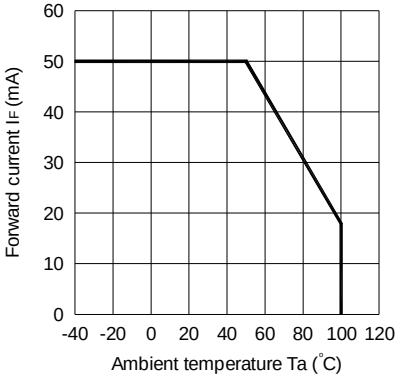


Fig.2 On-state Current vs. Ambient Temperature

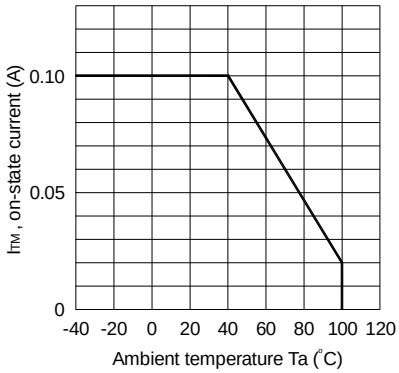


Fig.3 Minimum Trigger Current vs. Ambient Temperature

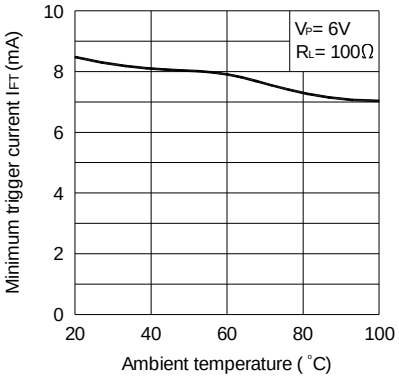


Fig.4 Forward Current vs. Forward Voltage

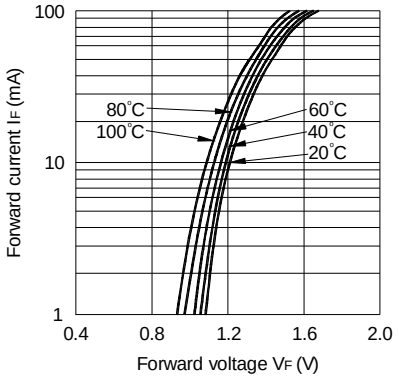


Fig.5 On-state Voltage vs. Ambient Temperature


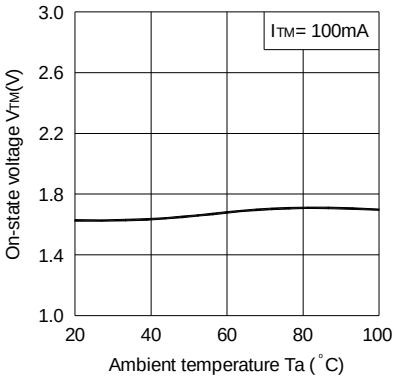


Fig.6 Holding Current vs. Ambient Temperature

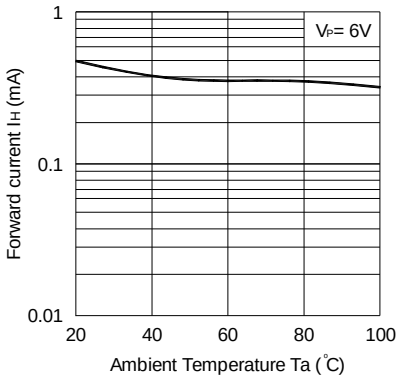

CHARACTERISTICS CURVES

Fig.7 Turn-on Time vs. Forward Current

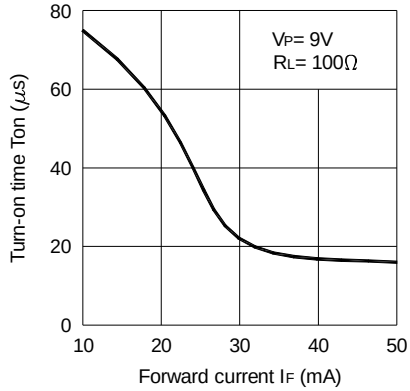


Fig.8 Repetitive Peak Off-state Current vs. Temperature



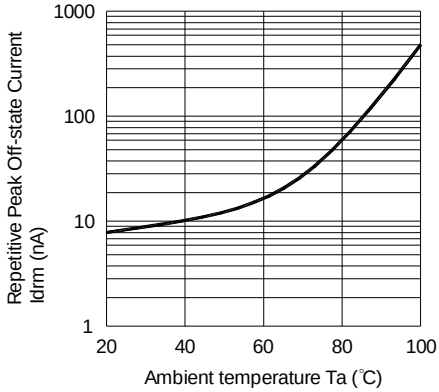


Fig.9 On-state Current vs. On-state Voltage

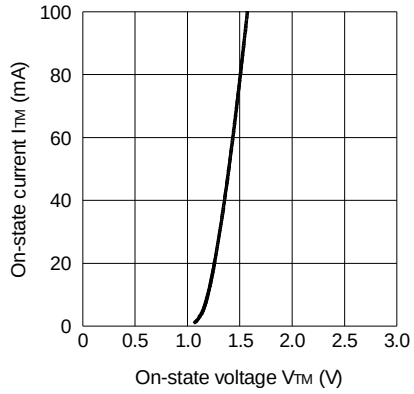


Basic Driver Circuit

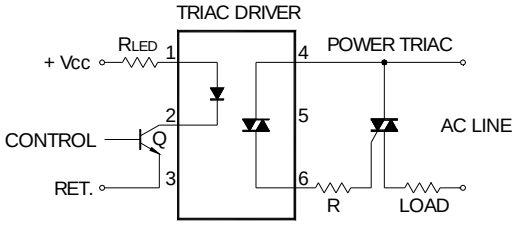

RLED= (Vcc-VF LED-VsatQ)/ IFT
R= Vp AC line/ITSM

RECOMMENDED FOOT PRINT PATTERNS (MOUNT PAD)

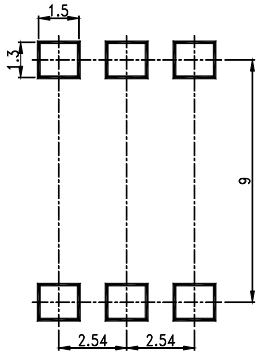

Unit : mm

Notes:

- Lite-On is continually improving the quality, reliability, function or design and Lite-On reserves the right to make changes without further notices.
- The products shown in this publication are designed for the general use in electronic applications such as office automation equipment, communications devices, audio/visual equipment, electrical application and instrumentation.
- For equipment/devices where high reliability or safety is required, such as space applications, nuclear power control equipment, medical equipment, etc, please contact our sales representatives.
- When requiring a device for any ”specific” application, please contact our sales in advice.
- If there are any questions about the contents of this publication, please contact us at your convenience.
- The contents described herein are subject to change without prior notice.
- No contacting on pin 5.
- Inhibit immersing unit’s body in solder paste.