PD 1.035A

International
IOR Rectifier

HEXFET® Power MOSFET Photovoltaic Relay

Series PVG612

Microelectronic
Power IC Relay
Single Pole, Normally Open, 0-60V, 1.0A AC/ 2.0 A DC

General Description


The PVG612 Series Photovoltaic Relay is a single-pole, normally open solid-state relay that can replace electromechanical relays in many applications. It utilizes International Rectifier's proprietary HEXFET power MOSFET as the output switch, driven by an integrated circuit photovoltaic generator of novel construction. The output switch is controlled by radiation from a GaAlAs light emitting diode (LED) which is optically isolated from the photovoltaic generator.

These units exceed the performance capabilities of electromechanical relays in operating life, sensitivity, stability of on-resistance, miniaturization, insensitivity to magnetic fields and ruggedess. The compact PVG612 is particularly suited for isolated switching of high currents from 12 to 48 Volt AC or DC power sources.

Series PVG612 Relays are packaged in a 6-pin, molded DIP package with either through-hole or surface mount (gull-wing) terminals. It is available in standard plastic shipping tubes or on tape-and-reel. Please refer to Part Identification information opposite.

PVG612 Features

- HEXFET Power MOSFET output
- Bounce-free operation
- High load current capacity
- High off-state resistance
- Linear AC/DC operation
- 4,000 V_{RMS} I/O isolation
- Solid-State reliability
- UL recognized and CSA certified

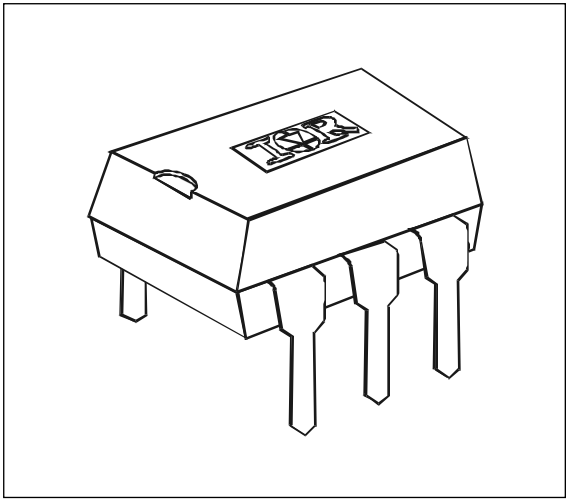

Applications

- Programmable Logic Controllers
- Computers and Peripheral Devices
- Audio Equipment
- Power Supplies and Power Distribution
- Control of Displays and Indicators
- Industrial Automation

Part Identification

PVG612	through-hole
PVG612S	surface-mount
PVG612S-T	surface-mount, Tape and Reel

(HEXFET is the registered trademark for International Rectifier Power MOSFETs)

To Order
ご注文

Series PVG612 — HEXFET® Photovoltaic Relay

International IOR Rectifier

Electrical Specifications (-40°C ≤ T_A ≤ +85°C unless otherwise specified)


INPUT CHARACTERISTICS	Limits	Units
Minimum Control Current (see figure 1)	5.0	mA
Maximum Control Current for Off-State Resistance @ T_A = +25°C	0.4	mA
Control Current Range (Caution: current limit input LED, see figure 6)	5.0 to 25	mA
Maximum Reverse Voltage	7.0	V

OUTPUT CHARACTERISTICS		Limits	Units
Operating Voltage Range		0 to ±60	$V_{(DC\ or\ AC\ peak)}$
Maximum Load Current @ T_A = +40°C, 10mA Control (see figure 1)			
	A Connection	1.0	A (AC or DC)
	B Connection	1.5	A (DC)
	C Connection	2.0	A (DC)
Maximum Pulsed Load Current @ T_A =+25°C (100 ms @ 10% Duty Cycle)			
	A Connection	2.4	A (AC or DC)
Maximum On-State Resistance @T_A =+25°C			
For 1A pulsed load, 10mA Control (see figure 4)	A Connection	500	mΩ
	B Connection	250	mΩ
	C Connection	150	mΩ
Minimum Off-State Resistance @T_A =+25°C, ±48V (see figure 5)		10^8	Ω
Maximum Turn-On Time @T_A =+25°C (see figure 7)			
For 500mA, 50 V_{DC} load, 10mA Control		2.0	ms
Maximum Turn-Off Time @T_A =+25°C (see figure 7)			
For 500mA, 50 V_{DC} load, 10mA Control		0.5	ms
Maximum Output Capacitance @ 50V_{DC} (see figure 2)		130	pF


GENERAL CHARACTERISTICS		Limits	Units
Minimum Dielectric Strength, Input-Output		4000	V_{RMS}
Minimum Insulation Resistance, Input-Output, @T_A =+25°C, 50%RH, 100V_{DC}		10^{12}	Ω
Maximum Capacitance, Input-Output		1.0	pF
Maximum Pin Soldering Temperature (10 seconds maximum)		+260	°C
Ambient Temperature Range:	Operating	-40 to +85	
	Storage	-40 to +100	

Connection Diagrams


"A" Connection



"B" Connection



"C" Connection



To Order ご注文

International
IOR Rectifier

Series PVG612 — HEXFET® Photovoltaic Relay

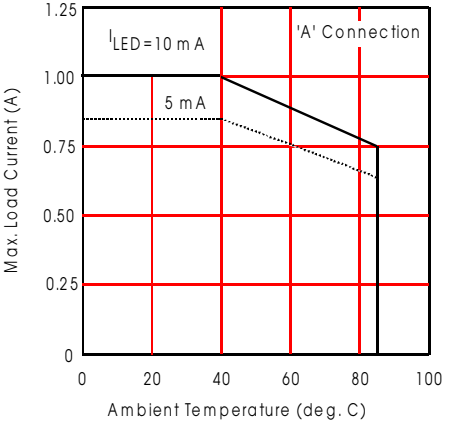


Figure 1. Current Derating Curves*

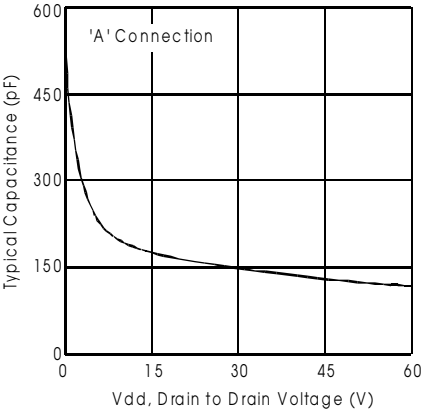


Figure 2. Typical Output Capacitance

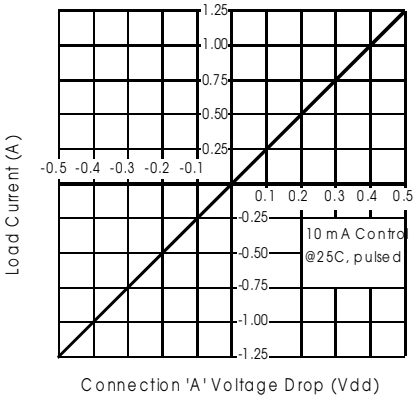


Figure 3. Linearity Characteristics

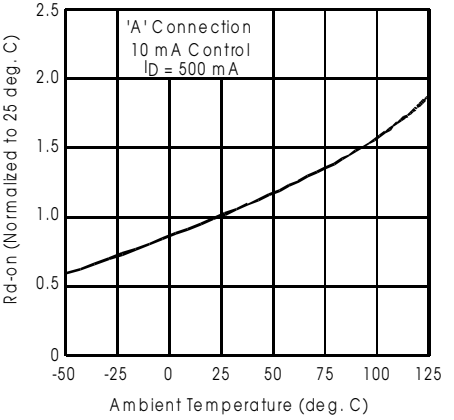


Figure 4. Typical Normalized On-Resistance

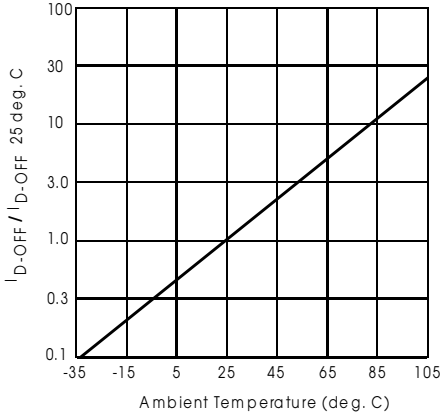


Figure 5. Typical Normalized Off-State Leakage

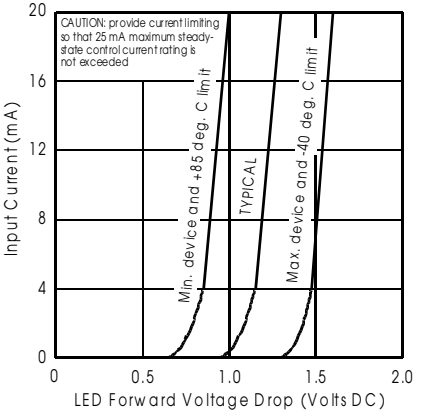


Figure 6. Input Characteristics (Current Controlled)

* Derating of 'B' and 'C' connection at +85°C will be 70% of that specified at +40°C and is linear from +40°C to +85°C.

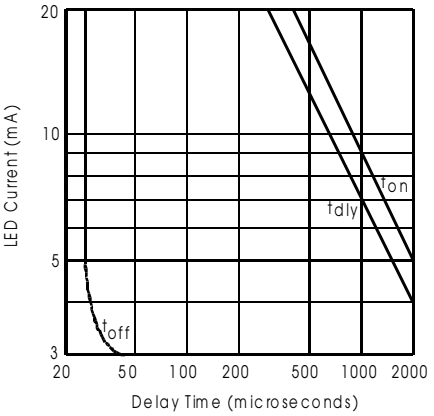


Figure 7. Typical Delay Times



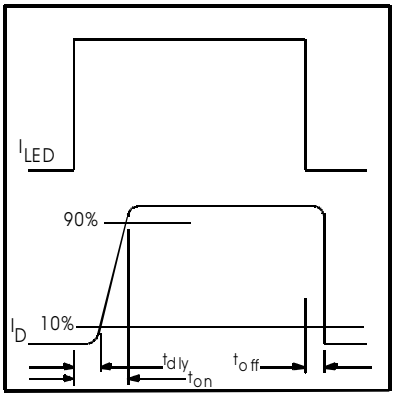


Figure 8. Delay Time Definitions

Case Outline

Dimensions in millimeters (inches)

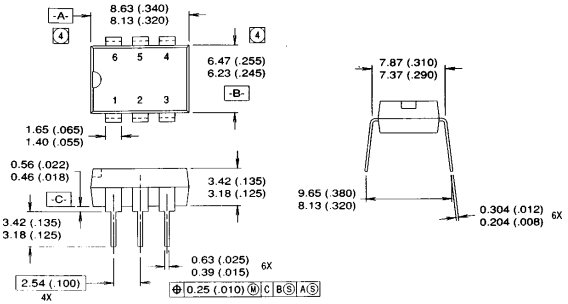

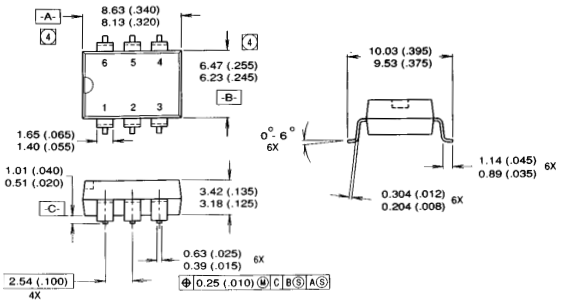

Mechanical Specifications:

1. Dimensioning and tolerancing per ANSI Y14.5M-1982
2. Controlling Dimension: Inch
4. Dimension does not include mold protrusions. Mold protrusions shall not exceed 0.25 (.010).

International IOR Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, Tel: (310) 322 3331
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, UK Tel: ++ 44 1883 713215
IR CANADA: 7321 Victoria Park Ave., Suite 201, Markham, Ontario L3R 2Z8, Tel: (905) 475 1897
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg Tel: ++ 49 6172 96590
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino Tel: ++ 39 11 451 0111
IR FAR EAST: K&H Bldg., 2F, 3-30-4 Nishi-Ikeburo 3-Chome, Toshima-Ku, Tokyo, Japan 171 Tel: ++ 81 3 3983 0641
IR SOUTHEAST ASIA: 315 Outram Road, #10-02 Tan Boon Liat Building, Singapore 0316 Tel: ++ 65 221 8371
http://www/irf.com/

Data and specifications subject to change without notice. 9/96