Ordering number: EN 5180

Thick Film Hybrid IC

SANYO

No. 5180

STK405-090

2ch AF Power Amplifier (Split Power Supply) 50W + 50W min, THD = 10%

Overview

The STK405-090, a member of the STK405-000 series, is a low-cost, 2-channel audio power amplifier hybrid IC that is ideal for a wide range of stereo sets. It has dedicated 6Ω output drive, in contrast with the STK401-000 series which supports 6Ω/3Ω output drive.

Features

- Class B amplifiers
- Output load impedance R_L = 6Ω support
- EIAJ-output compatible (f = 1kHz, THD = 10%)
- Low supply switching shock noise
- Pin assignment grouped into individual blocks of inputs, outputs and supply lines to minimize the adverse effects of pattern layout on operating characteristics
- External bootstrap circuit not necessary
- Standby operation possible using external circuit
- Voltage gain VG = 26dB for easy gain distribution within the set
- Member of 10W/ch to 80W/ch pin-compatible series

Series Organization


The following devices form a series with differing output capacity. Some of the following devices are under development. Contact your Sanyo sales representative if you require more detailed information.

Type No.	Output power	Supply voltage [V]	
		V_{CC} max	V_{CC}
STK405-010	10W + 10W	±26.0	±14.0
STK405-030	20W + 20W	±30.5	±18.5
STK405-050	30W + 30W	±34.5	±22.0
STK405-070	40W + 40W	±39.0	±25.0
STK405-090	50W + 50W	±42.0	±26.5
STK405-100	60W + 60W	±45.0	±29.0
STK405-110	70W + 70W	±50.0	±31.0
STK405-120	80W + 80W	±52.5	±33.0

Package Dimensions

unit: mm

4158

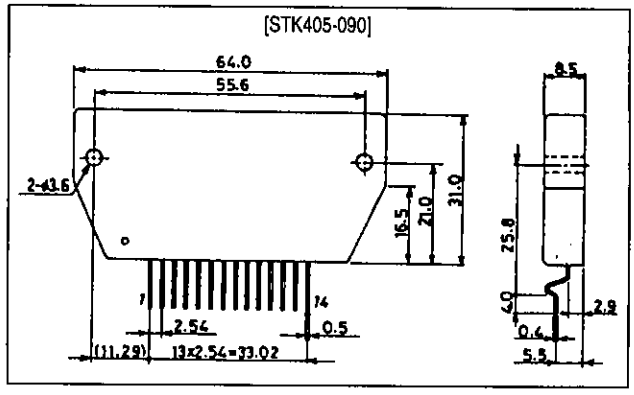

Specifications

Maximum Ratings at Ta = 25°C


Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{CC} max		±42	V
Thermal resistance	θj-c	Per power transistor	2.7	°C/W
Junction temperature	Tj		150	°C
Operating substrate temperature	Tc		125	°C
Storage temperature	Tstg		−30 to +125	°C
Available time for load short-circuit	t_s	V_{CC} = ±26.5V, R_L = 6Ω, f = 50Hz, P_O = 50W	1	s

Operating Characteristics at Ta = 25°C, R_L = 6Ω (noninductive load), Rg = 600Ω, VG = 26dB


Parameter	Symbol	Conditions	min	typ	max	Unit
Quiescent current	I_{CCO}	V_{CC} = ±34.0V, no load	–	12	20	mA
Output power	P_O	V_{CC} = ±26.5V, f = 1kHz, THD = 10.0%	50	–	–	W
Total harmonic distortion	THD	V_{CC} = ±26.5V, f = 1kHz, P_O = 5.0W	–	0.04	0.1	%
Frequency response	f_L, f_H	V_{CC} = ±26.5V, P_O = 1.0W, $^{+0}_{-3}$dB	–	20 to 50k	–	Hz
Input impedance	r_I	V_{CC} = ±26.5V, f = 1kHz, P_O = 1.0W	–	55	–	kΩ
Output noise voltage	V_{NO}	V_{CC} = ±34.0V, Rg = 10kΩ	–	–	1.2	mVrms
Neutral voltage	V_N	V_{CC} = ±34.0V	−100	0	+100	mV

Notes.
All tests are measured using a regulated voltage supply unless otherwise specified.
Available time for load short-circuit and output noise voltage are measured using the transformer supply specified below.
The output noise voltage is the peak value of an average-reading meter with an rms value scale (VTVM). A regulated AC supply (50Hz) should be used to eliminate the effects of AC primary line flicker noise.


Specified Transformer Supply (RP-25 or Equivalent)

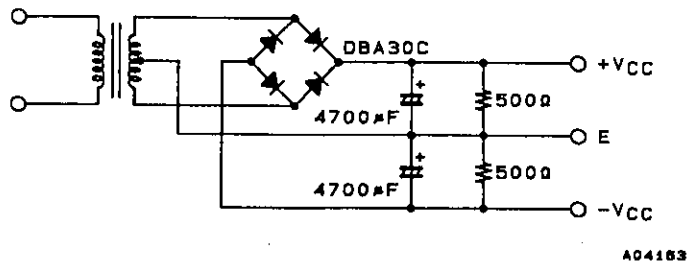


Block Diagram

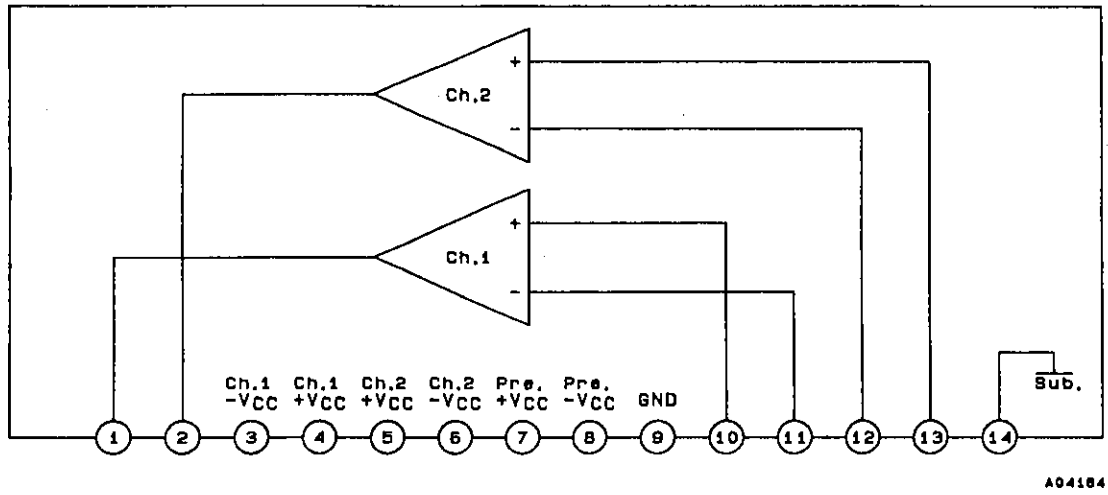

Test Circuit

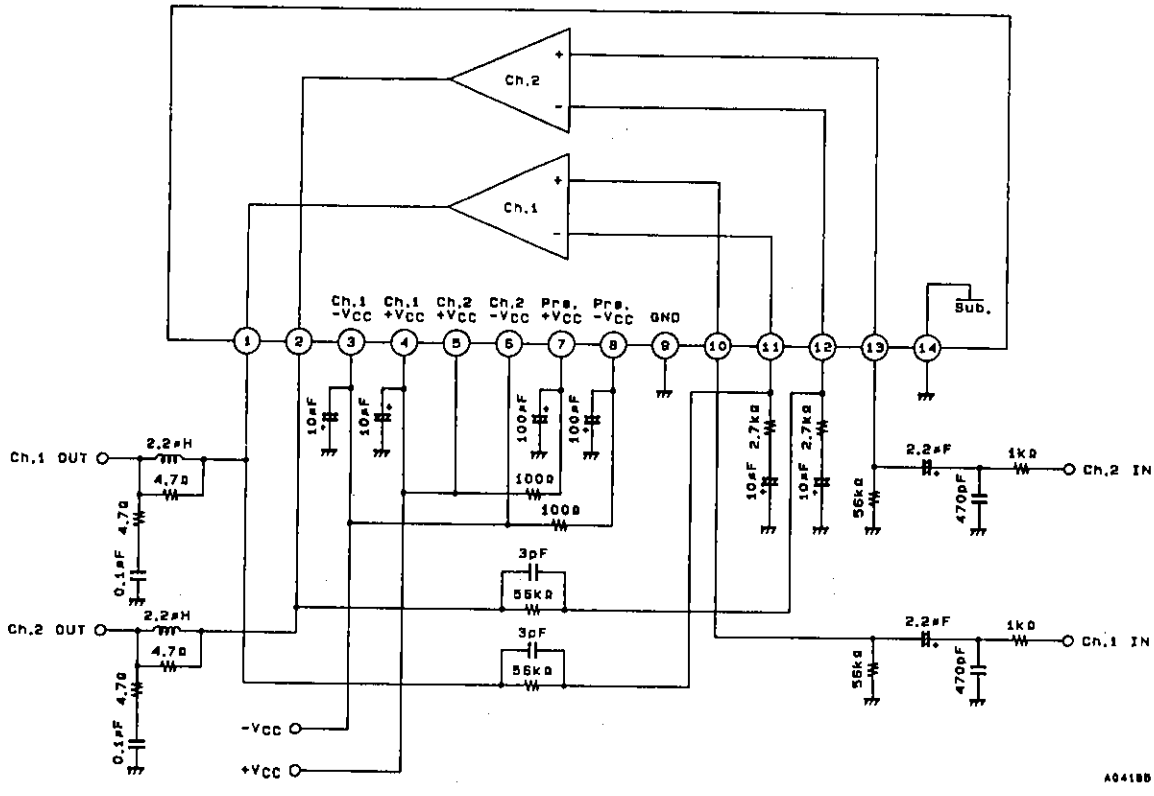

Sample Application Circuit (Standby Mode Supported)

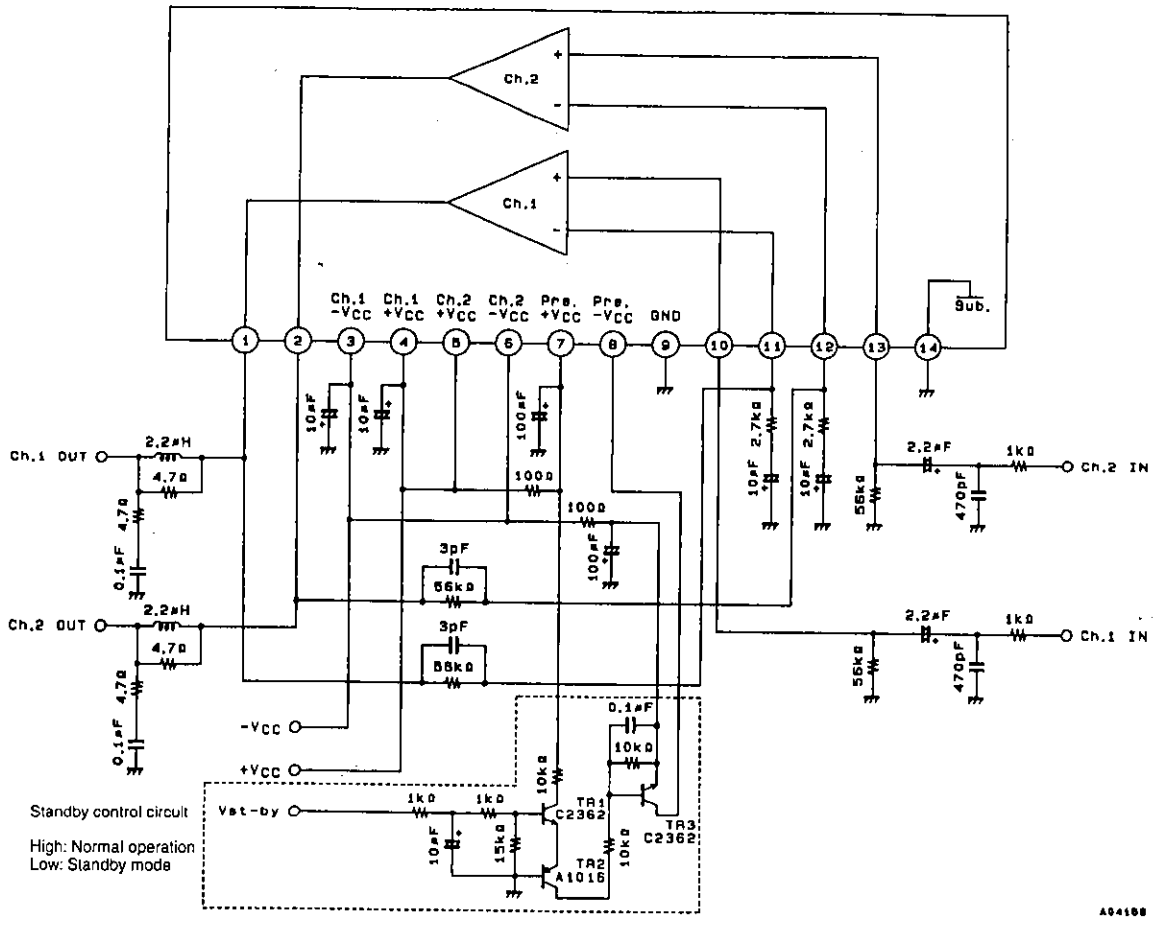

Heatsink Design Considerations

The heatsink thermal resistance, θc-a, required to dissipate the STK405-090 device total power dissipation, Pd, is determined as follows:

Condition 1: IC substrate temperature not to exceed 125°C.

$$Pd \times \theta c\text{-}a + Ta < 125°C \quad \ldots\ldots (1)$$

where Ta is the guaranteed maximum ambient temperature.

Condition 2: Power transistor junction temperature, Tj, not to exceed 150°C.

$$Pd \times \theta c\text{-}a + Pd/N \times \theta j\text{-}c + Ta < 150°C \quad \ldots\ldots (2)$$

where N is the number of power transistors and θj-c is the power transistor thermal resistance per transistor. Note that the power dissipated per transistor is the total, Pd, divided evenly among the N power transistors.

Expressions (1) and (2) can be rewritten making θc-a the subject.

$$\theta c\text{-}a < (125 - Ta)/Pd \quad \ldots\ldots (1)'$$

$$\theta c\text{-}a < (150 - Ta)/Pd - \theta j\text{-}c/N \quad \ldots\ldots (2)'$$

The heatsink required must have a thermal resistance that simultaneously satisfies both expressions.

The heatsink thermal resistance can be determined from (1)′ and (2)′ once the following parameters have been defined.

- Supply voltage: V_{CC}
- Load resistance: R_L
- Guaranteed maximum ambient temperature: Ta

The total device power dissipation when STK405-090 $V_{CC} = \pm 26.5V$ and $R_L = 6\Omega$, for a continuous sine wave signal, is a maximum of 48W, as shown in the Pd—P_O characteristic graph.

When estimating the power dissipation for an actual audio signal input, the rule of thumb is to select Pd corresponding to 1/10 P_O max (within safe limits) for a continuous sine wave input. For example,

$$Pd = 34.5W \text{ (for } 1/10\ P_O \text{ max} = 5W)$$

The STK405-090 has 4 power transistors, and the thermal resistance per transistor, θj-c, is 2.7°C/W. If the guaranteed maximum ambient temperature, Ta, is 50°C, then the required heatsink thermal resistance, θc-a, is:


From expression (1)′: θc-a < (125 – 50)/34.5
< 2.17

From expression (2)′: θc-a < (150 – 50)/34.5 – 2.7/4
< 2.22


Therefore, to satisfy both expressions, the required heatsink must have a thermal resistance less than 2.17°C/W.

This heatsink design example is based on a constant-voltage supply, and should be verified within your specific set environment.


Pd — P_O

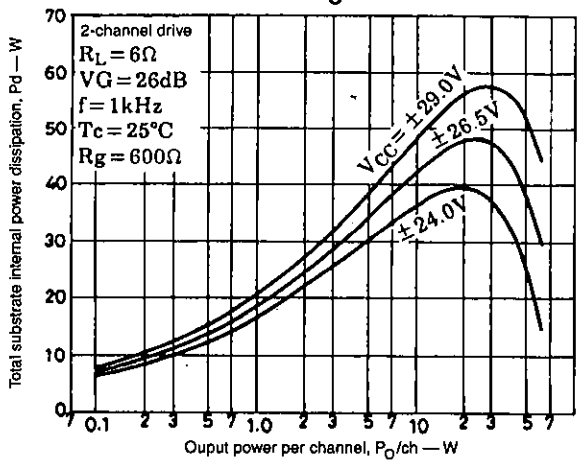


THD — P_O

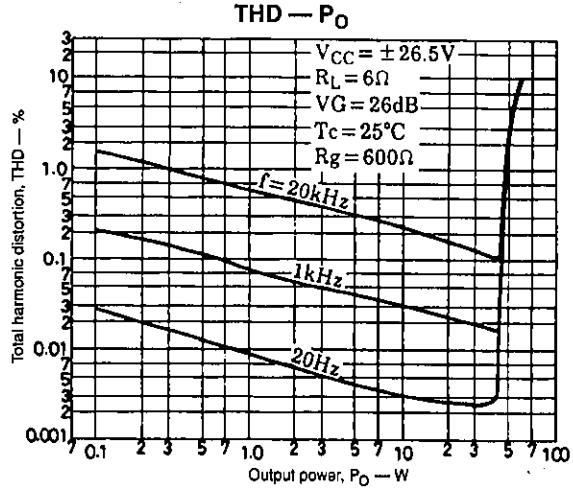


P_O — Vin

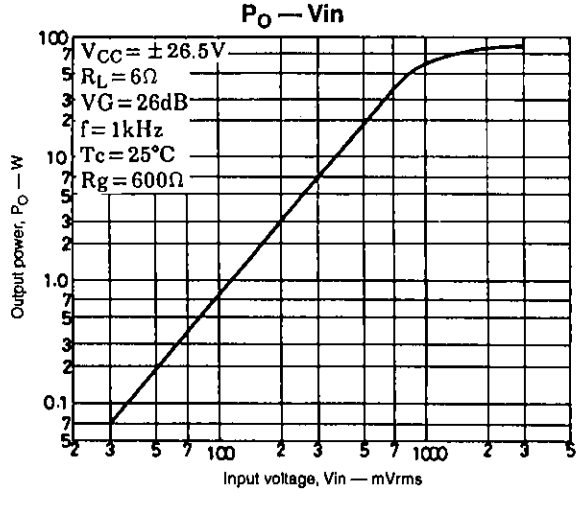


P_O — V_{CC}

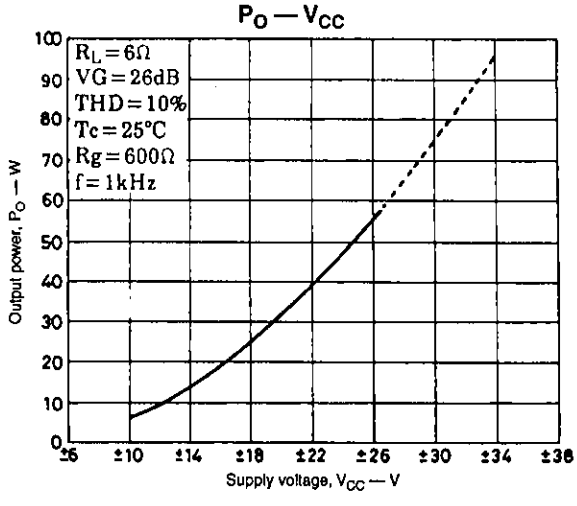


VG — f

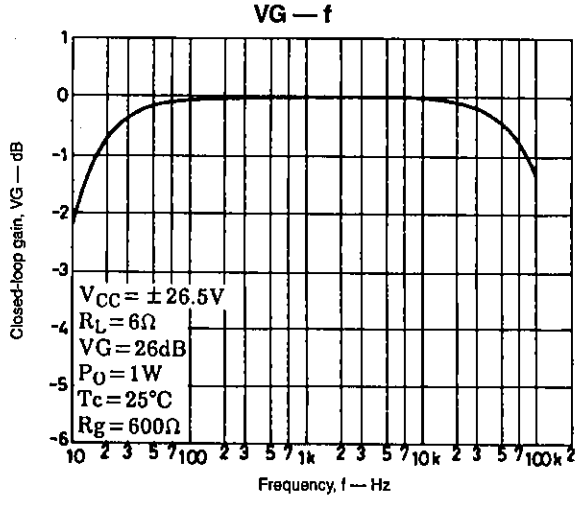


I_{CCO} — V_{CC}

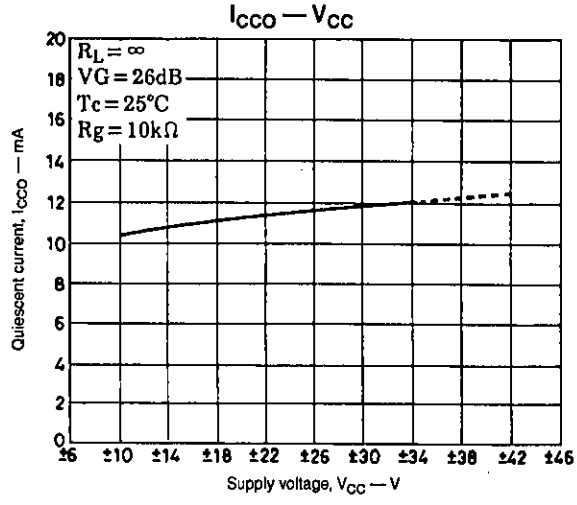


$V_N - V_{CC}$

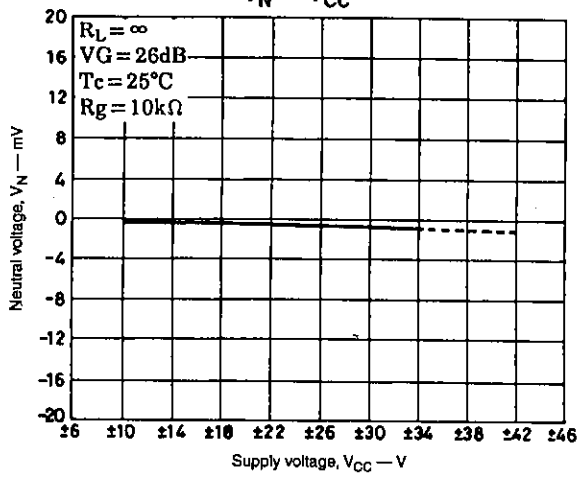

$I_{CCO} - Tc$

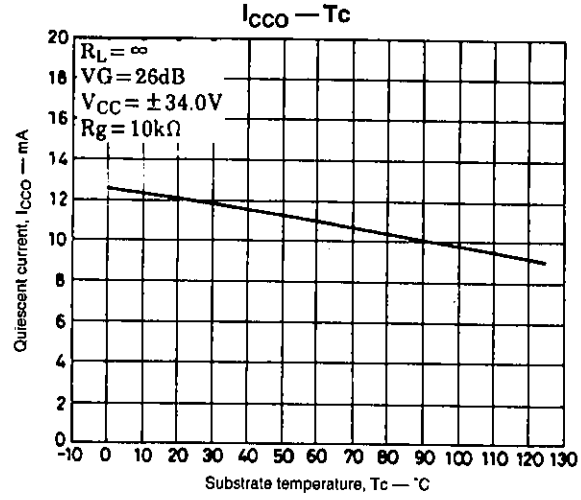

$V_N - Tc$

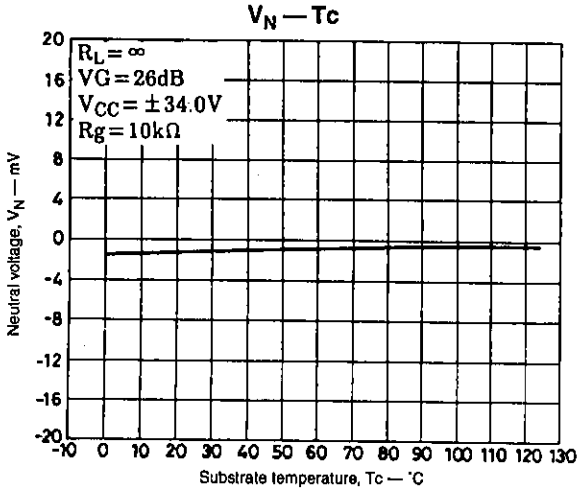

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
  ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees, jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of October, 1995. Specifications and information herein are subject to change without notice.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.