Silicon PNP Darlington Power Transistors TIP125/126/127

DESCRIPTION

·With TO-220C package
·DARLNGTON
·High DC current gain
·Low collector saturation voltage
·Complement to type TIP120/121/122

APPLICATIONS

·Designed for general–purpose amplifier and low–speed switching applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

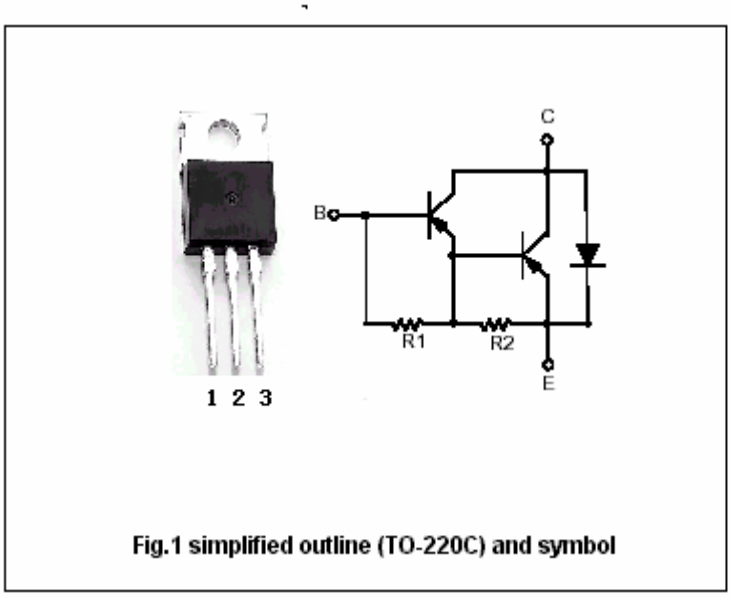


Fig.1 simplified outline (TO-220C) and symbol

ABSOLUTE MAXIMUM RATINGS(Tc=25□)

SYMBOL	PARAMETER		CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	TIP125	Open emitter	-60	V
		TIP126		-80	
		TIP127		-100	
V_{CEO}	Collector-emitter voltage	TIP125	Open base	-60	V
		TIP126		-80	
		TIP127		-100	
V_{EBO}	Emitter-base voltage		Open collector	-5	V
I_C	Collector current-DC			-5	A
I_{CM}	Collector current-Pulse			-8	A
I_B	Base current-DC			-120	mA
P_C	Collector power dissipation		T_C=25□	65	W
			T_a=25□	2	
T_j	Junction temperature			150	□
T_{stg}	Storage temperature			-65~150	□

Silicon PNP Darlington Power Transistors TIP125/126/127

CHARACTERISTICS

Tj=25□ unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-emitter sustaining voltage	TIP125	I_C=-0.1A, I_B=0	-60			V
		TIP126		-80			
		TIP127		-100			
$V_{CE(sat)-1}$	Collector-emitter saturation voltage		I_C=-3A ,I_B=-12mA			-2.0	V
$V_{CE(sat)-2}$	Collector-emitter saturation voltage		I_C=-5A ,I_B=-20mA			-4.0	V
V_{BE}	Base-emitter on voltage		I_C=-3.0A ; V_{CE}=-3V			-2.5	V
I_{CBO}	Collector cut-off current	TIP125	V_{CB}=-60V, I_E=0			-0.2	mA
		TIP126	V_{CB}=-80V, I_E=0				
		TIP127	V_{CB}=-100V, I_E=0				
I_{CEO}	Collector cut-off current	TIP125	V_{CE}=-30V, I_B=0			-0.5	mA
		TIP126	V_{CE}=-40V, I_B=0				
		TIP127	V_{CE}=-50V, I_B=0				
I_{EBO}	Emitter cut-off current		V_{EB}=-5V; I_C=0			-2	mA
h_{FE-1}	DC current gain		I_C=-0.5A ; V_{CE}=-3V	1000			
h_{FE-2}	DC current gain		I_C=-3.0A ; V_{CE}=-3V	1000			
C_{OB}	Output capacitance		I_E=0 ; V_{CB}=-10V,f=0.1MHz			300	pF

PACKAGE OUTLINE

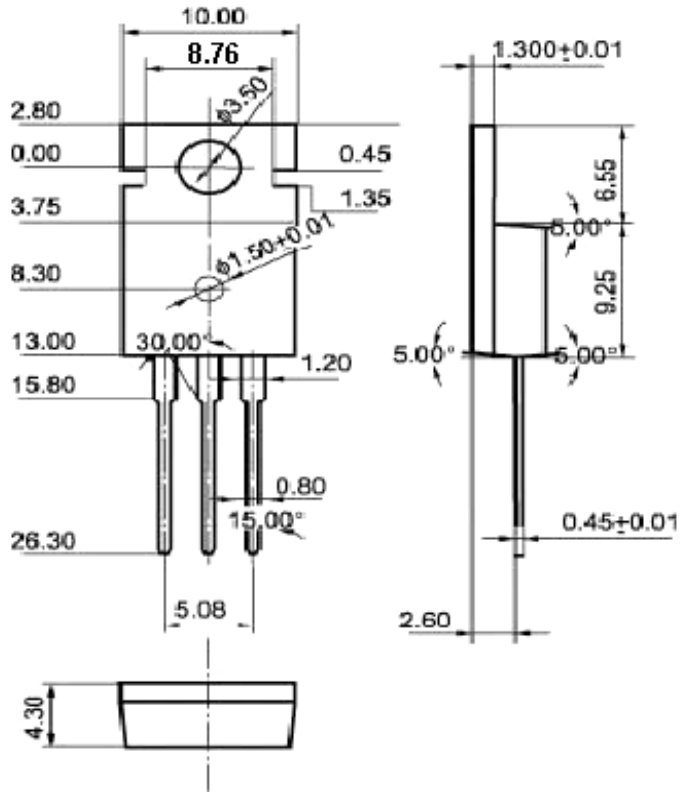


Fig.2 Outline dimensions

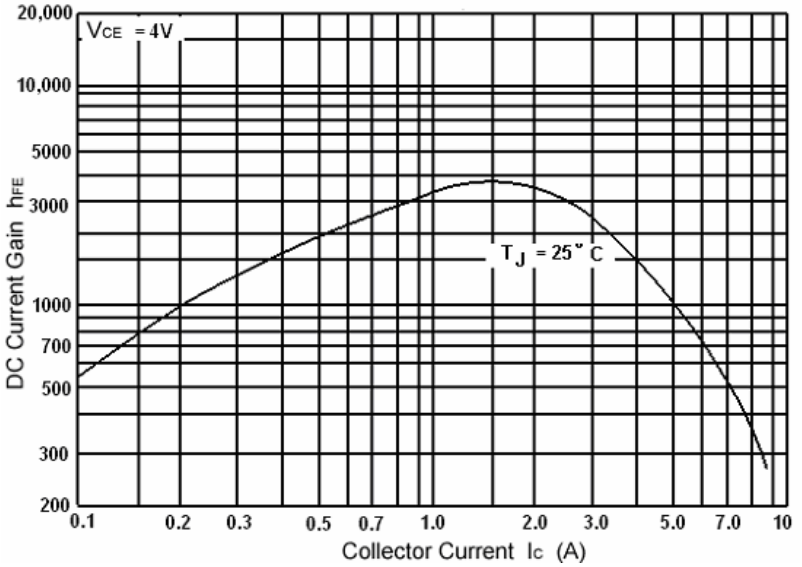


Fig.3 DC current Gain

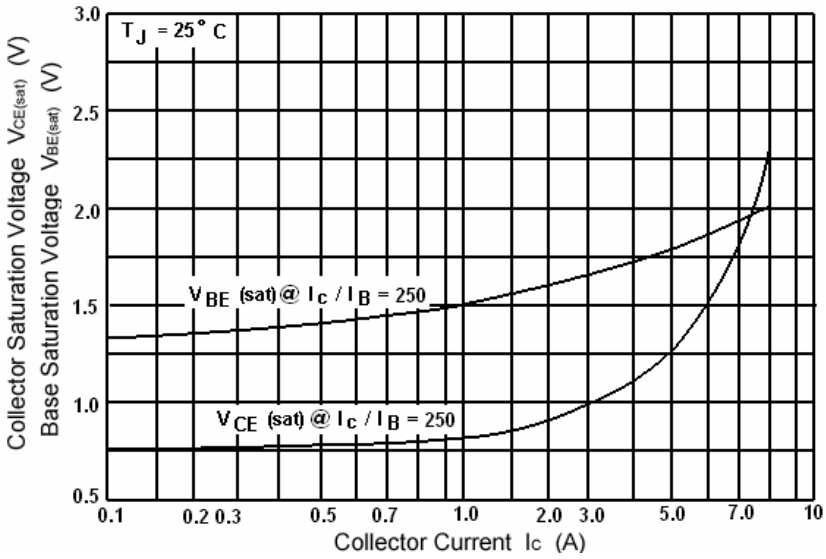


Fig.4 Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

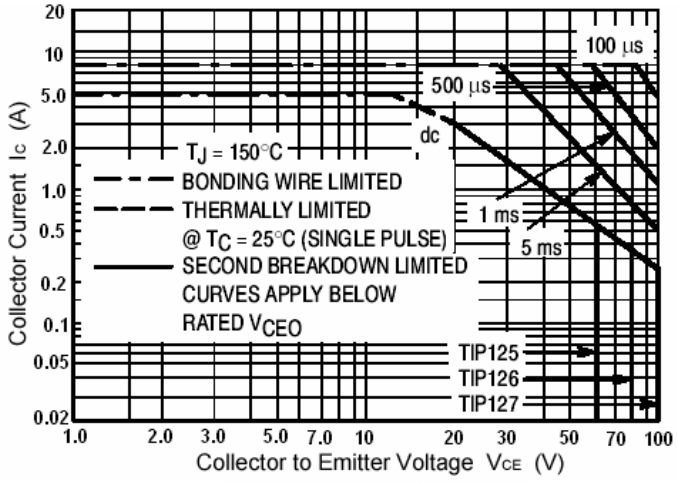


Fig.5 Safe Operating Area