140MHz Video Current Feedback Amplifier

FEATURES

- **140MHz Bandwidth: A_V = 2, R_L = 150Ω**
- **1100V/μs Slew Rate**
- Low Cost
- 30mA Output Drive Current
- 0.01% Differential Gain
- 0.01° Differential Phase
- High Input Impedance: 14MΩ, 3pF
- Wide Supply Range: ±2V to ±15V
- Shutdown Mode: I_S < 250μA
- Low Supply Current: I_S = 10mA
- Inputs Common Mode to Within 1.5V of Supplies
- Outputs Swing Within 0.8V of Supplies

APPLICATIONS

- Video Amplifiers
- Cable Drivers
- RGB Amplifiers
- Test Equipment Amplifiers
- 50Ω Buffers for Driving Mixers

DESCRIPTION

The LT1227 is a current feedback amplifier with wide bandwidth and excellent video characteristics. The low differential gain and phase, wide bandwidth, and 30mA output drive current make the LT1227 well suited to drive cables in video systems.


A shutdown feature switches the device into a high impedance, low current mode, allowing multiple devices to be connected in parallel and selected. Input to output isolation in shutdown is 70dB at 10MHz for input amplitudes up to $10V_{P-P}$. The shutdown pin interfaces to open collector or open drain logic and takes only 4μs to enable or disable.

The LT1227 comes in the industry standard pinout and can upgrade the performance of many older products. For a dual or quad version, see the LT1229/1230 data sheet.


The LT1227 is manufactured on Linear Technology's proprietary complementary bipolar process.

TYPICAL APPLICATION

Video Cable Driver

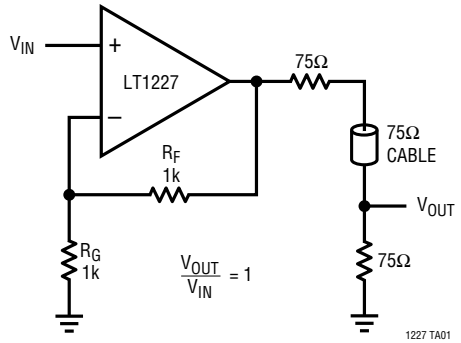


Differential Gain and Phase vs Supply Voltage

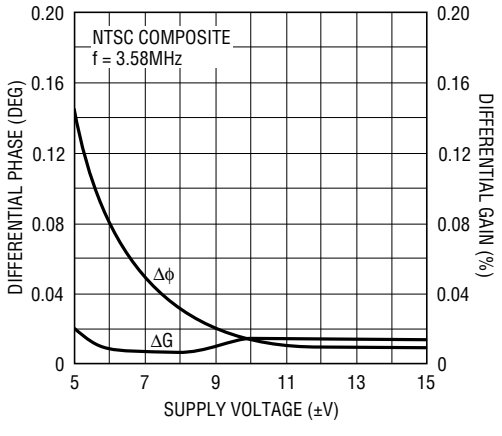

ABSOLUTE MAXIMUM RATINGS

Supply Voltage ..... ±18V
Input Current ..... ±15mA
Output Short Circuit Duration (Note 1) ..... Continuous
Operating Temperature Range
LT1227C ..... 0°C to 70°C
LT1227M ..... –55°C to 125°C
Storage Temperature Range ..... –65°C to 150°C
Junction Temperature
Plastic Package ..... 150°C
Ceramic Package ..... 175°C
Lead Temperature (Soldering, 10 sec.) ..... 300°C

PACKAGE/ORDER INFORMATION

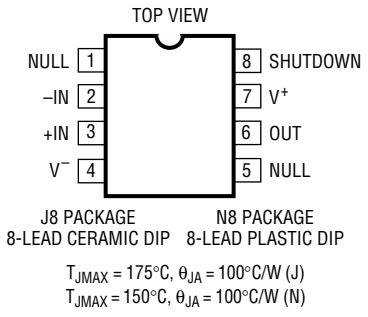


J8 PACKAGE
8-LEAD CERAMIC DIP

N8 PACKAGE
8-LEAD PLASTIC DIP

T_{JMAX} = 175°C, θ_{JA} = 100°C/W (J)
T_{JMAX} = 150°C, θ_{JA} = 100°C/W (N)

ORDER PART NUMBER

LT1227MJ8
LT1227CN8

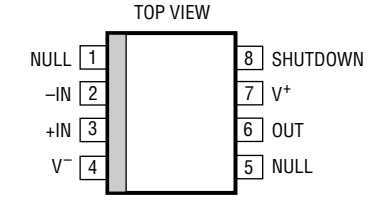

S8 PACKAGE
8-LEAD PLASTIC SO

T_{JMAX} = 150°C, θ_{JA} = 150°C/W

LT1227CS8

S8 PART MARKING

1227

Consult factory for Industrial grade parts.

ELECTRICAL CHARACTERISTICS

V_{CM} = 0, ±5V ≤ V_S ≤ ±15V, pulse tested, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	T_A = 25°C			±3	±10	mV
			●			±15	mV
	Input Offset Voltage Drift		●		10		µV/°C
I_{IN+}	Noninverting Input Current	T_A = 25°C			±0.3	±3	µA
			●			±10	µA
$I_{IN–}$	Inverting Input Current	T_A = 25°C			±10	±60	µA
			●			±100	µA
e_n	Input Noise Voltage Density	f = 1kHz, R_F = 1k, R_G = 10Ω, R_S = 0Ω			3.2		nV/√Hz
$+i_n$	Noninverting Input Noise Current Density	f = 1kHz			1.7		pA/√Hz
$–i_n$	Inverting Input Noise Current Density	f = 1kHz			32		pA/√Hz
R_{IN}	Input Resistance	V_{IN} = ±13V, V_S = ±15V	●	1.5	14		MΩ
		V_{IN} = ±3V, V_S = ±5V	●	1.5	11		MΩ
C_{IN}	Input Capacitance				3		pF
	Input Voltage Range	V_S = ±15V, T_A = 25°C		±13	±13.5		V
			●	±12			V
		V_S = ±5V, T_A = 25°C		±3	±3.5		V
			●	±2			V
CMRR	Common-Mode Rejection Ratio	V_S = ±15V, V_{CM} = ±13V, T_A = 25°C		55	62		dB
		V_S = ±15V, V_{CM} = ±12V	●	55			dB
		V_S = ±5V, V_{CM} = ±3V, T_A = 25°C		55	61		dB
		V_S = ±5V, V_{CM} = ±2V	●	55			dB
	Inverting Input Current Common-Mode Rejection	V_S = ±15V, V_{CM} = ±13V, T_A = 25°C			3.5	10	µA/V
		V_S = ±15V, V_{CM} = ±12V	●			10	µA/V
		V_S = ±5V, V_{CM} = ±3V, T_A = 25°C			4.5	10	µA/V
		V_S = ±5V, V_{CM} = ±2V	●			10	µA/V

ELECTRICAL CHARACTERISTICS

V_{CM} = 0, ±5V ≤ V_S ≤ ±15V, pulse tested, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
PSRR	Power Supply Rejection Ratio	V_S = ±2V to ±15V, T_A = 25°C		60	80		dB
		V_S = ±3V to ±15V	●	60			dB
	Noninverting Input Current Power Supply Rejection	V_S = ±2V to ±15V, T_A = 25°C			2	50	nA/V
		V_S = ±3V to ±15V	●			50	nA/V
	Inverting Input Current Power Supply Rejection	V_S = ±2V to ±15V, T_A = 25°C			0.25	5	µA/V
		V_S = ±3V to ±15V	●			5	µA/V
A_V	Large-Signal Voltage Gain	V_S = ±15V, V_{OUT} = ±10V, R_L = 1k	●	55	72		dB
		V_S = ±5V, V_{OUT} = ±2V, R_L = 150Ω	●	55	72		dB
R_{OL}	Transresistance, $\Delta V_{OUT}/\Delta I_{IN^-}$	V_S = ±15V, V_{OUT} = ±10V, R_L = 1k	●	100	270		kΩ
		V_S = ±5V, V_{OUT} = ±2V, R_L = 150Ω	●	100	240		kΩ
V_{OUT}	Maximum Output Voltage Swing	V_S = ±15V, R_L = 400Ω, T_A = 25°C		±12	±13.5		V
			●	±10			V
		V_S = ±5V, R_L = 150Ω, T_A = 25°C		±3	±3.7		V
			●	±2.5			V
I_{OUT}	Maximum Output Current	R_L = 0Ω, T_A = 25°C		30	60		mA
I_S	Supply Current (Note 2)	V_S = ±15V, V_{OUT} = 0V, T_A = 25°C			10	15.0	mA
			●			17.5	mA
	Positive Supply Current, Shutdown	V_S = ±15V, Pin 8 Voltage = 0V, T_A = 25°C			120	300	µA
			●			500	µA
I_8	Shutdown Pin Current (Note 3)	V_S = ±15V	●			300	µA
	Output Leakage Current, Shutdown	V_S = ±15V, Pin 8 Voltage = 0V, T_A = 25°C				10	µA
SR	Slew Rate (Notes 4 and 5)	T_A = 25°C		500	1100		V/µs
t_r, t_f	Rise and Fall Time, V_{OUT} = $1V_{P-P}$	V_S = ±5V, R_F = 1k, R_G = 1k, R_L = 150Ω			8.7		ns
BW	Small-Signal Bandwidth	V_S = ±15V, R_F = 1k, R_G = 1k, R_L = 150Ω			140		MHz
t_r, t_f	Small-Signal Rise and Fall Time	V_S = ±15V, R_F = 1k, R_G = 1k, R_L = 100Ω			3.3		ns
	Propagation Delay	V_S = ±15V, R_F = 1k, R_G = 1k, R_L = 100Ω			3.4		ns
	Small-Signal Overshoot	V_S = ±15V, R_F = 1k, R_G = 1k, R_L = 100Ω			5		%
t_S	Settling Time	0.1%, V_{OUT} = 10V, R_F = 1k, R_G = 1k, R_L = 1k			50		ns
	Differential Gain (Note 6)	V_S = ±15V, R_F = 1k, R_G = 1k, R_L = 150Ω			0.014		%
		V_S = ±15V, R_F = 1k, R_G = 1k, R_L = 1k			0.010		%
	Differential Phase (Note 6)	V_S = ±15V, R_F = 1k, R_G = 1k, R_L = 150Ω			0.010		DEG
		V_S = ±15V, R_F = 1k, R_G = 1k, R_L = 1k			0.013		DEG

The ● denotes specifications which apply over the operating temperature range.

Note 1: A heat sink may be required depending on the power supply voltage.

Note 2: The supply current of the LT1227 has a negative temperature coefficient. For more information, see Typical Performance Characteristics curves.

Note 3: Ramp pin 8 voltage down from 15V while measuring I_S. When I_S drops to less than 0.5mA, measure pin 8 current.


Note 4: Slew rate is measured at ±5V on a ±10V output signal while operating on ±15V supplies with R_F = 2k, R_G = 220Ω and R_L = 400Ω.

Note 5: AC parameters are 100% tested on the ceramic and plastic DIP package parts (J and N suffix) and are sample tested on every lot of the SO packaged parts (S suffix).

Note 6: NTSC composite video with an output level of 2V.


TYPICAL PERFORMANCE CHARACTERISTICS

Voltage Gain and Phase vs Frequency, Gain = 6dB

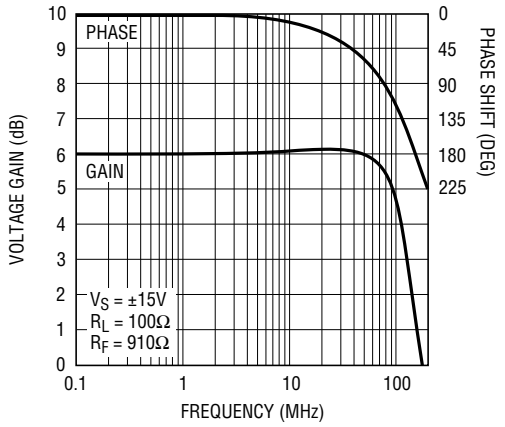


LT1227 • TPC01

–3dB Bandwidth vs Supply Voltage, Gain = 2, R_L = 100Ω

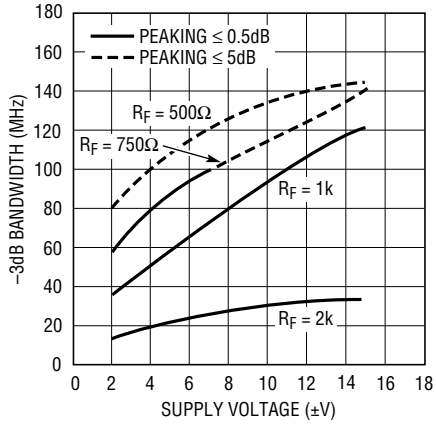


LT1227 • TPC02

–3dB Bandwidth vs Supply Voltage, Gain = 2, R_L = 1k

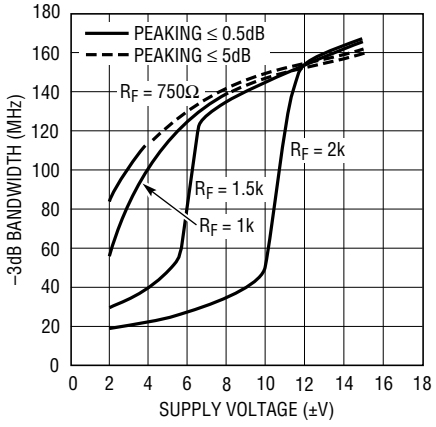


LT1227 • TPC03

Voltage Gain and Phase vs Frequency, Gain = 20dB

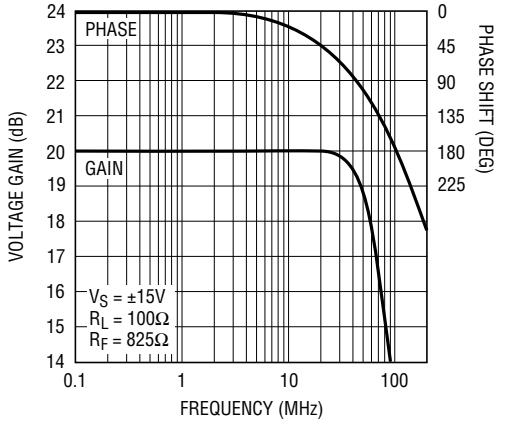


LT1227 • TPC04

–3dB Bandwidth vs Supply Voltage, Gain = 10, R_L = 100Ω

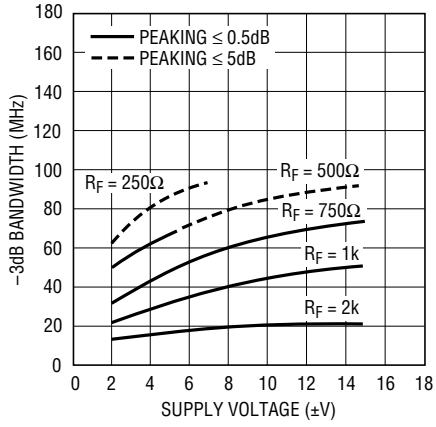


LT1227 • TPC05

–3dB Bandwidth vs Supply Voltage, Gain = 10, R_L = 1k

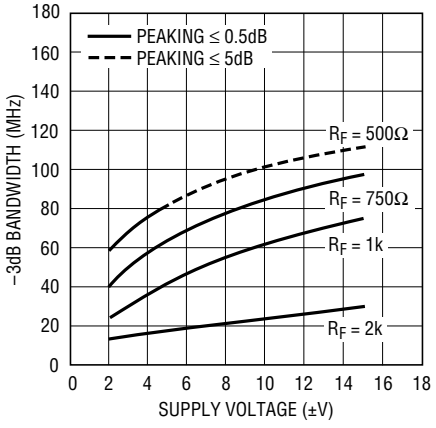


LT1227 • TPC06

Voltage Gain and Phase vs Frequency, Gain = 40dB

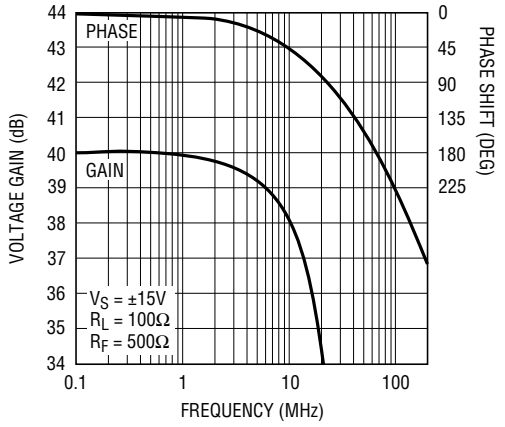


LT1227 • TPC07

–3dB Bandwidth vs Supply Voltage, Gain = 100, R_L = 100Ω

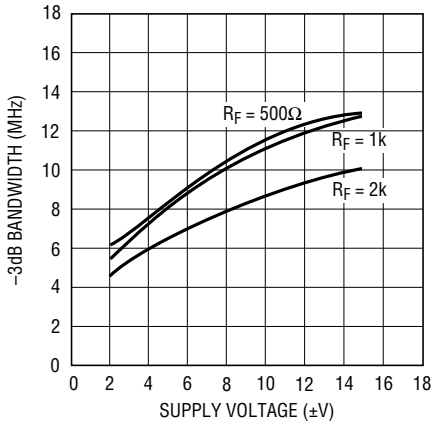

LT1227 • TPC08


–3dB Bandwidth vs Supply Voltage, Gain = 100, R_L = 1k

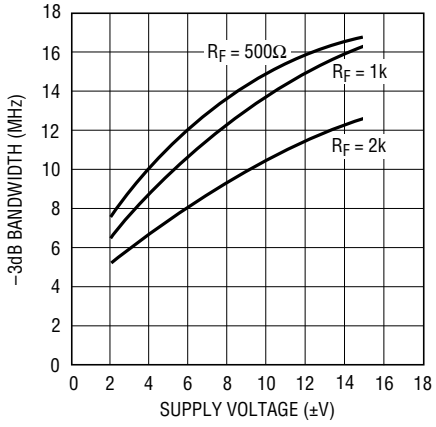

LT1227 • TPC09


TYPICAL PERFORMANCE CHARACTERISTICS

Maximum Capacitive Load vs Feedback Resistor

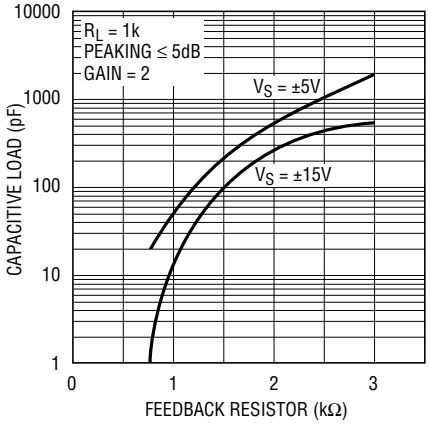


LT1227 • TPC10

Total Harmonic Distortion vs Frequency

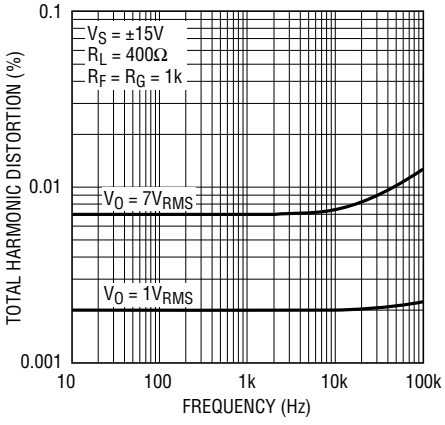


LT1227 • TPC11

Maximum Undistorted Output vs Frequency

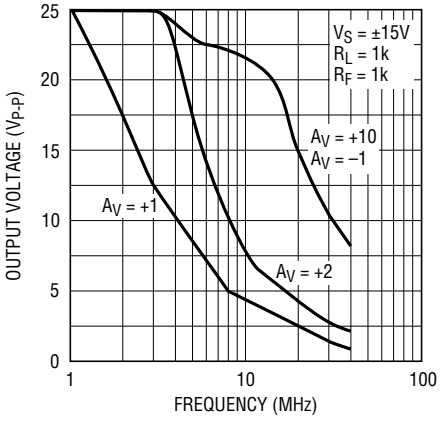


LT1127 • TPC12

Input Common Mode Limit vs Temperature

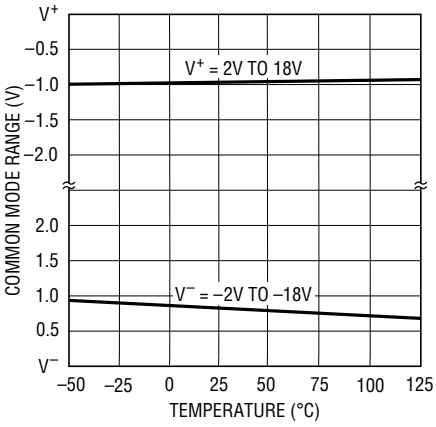


LT1227 • TPC13

Output Saturation Voltage vs Temperature

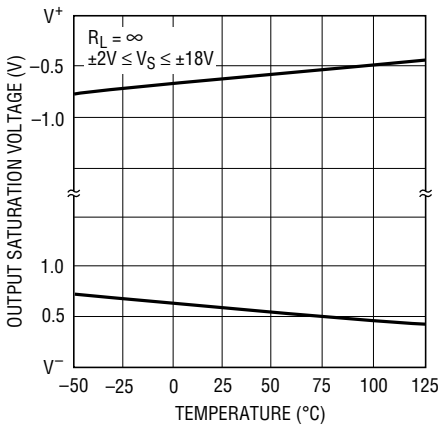


LT1227 • TPC14

Output Short-Circuit Current vs Junction Temperature

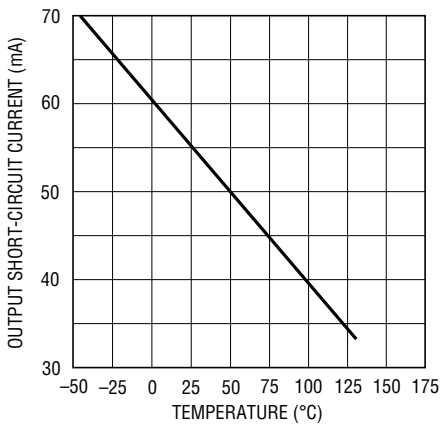


LT1227 • TPC15

Spot Noise Voltage and Current vs Frequency

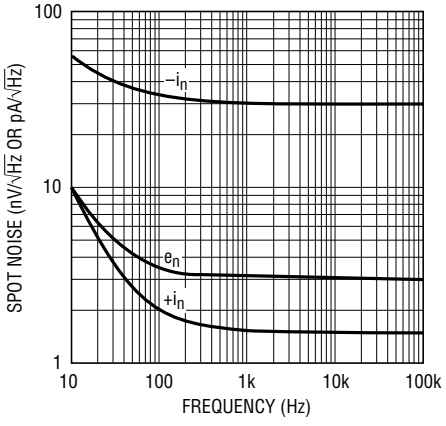


LT1227 • TPC16

Power Supply Rejection vs Frequency

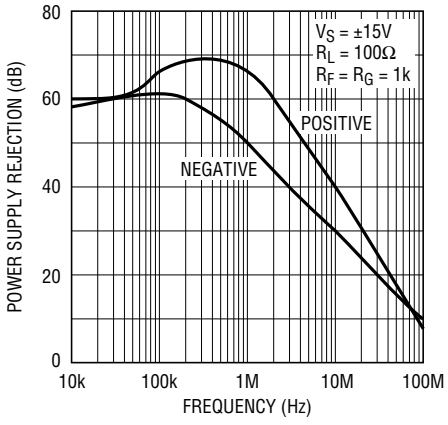

LT1227 • TPC17


Output Impedance vs Frequency

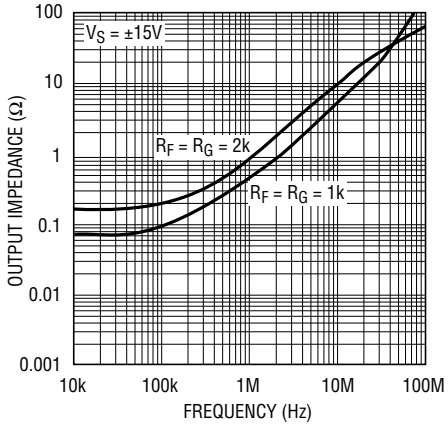

LT1227 • TPC18


TYPICAL PERFORMANCE CHARACTERISTICS

Settling Time to 10mV vs Output Step

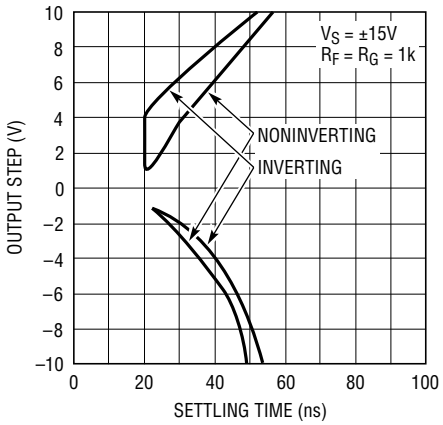


LT1227 • TPC19

Settling Time to 1mV vs Output Step

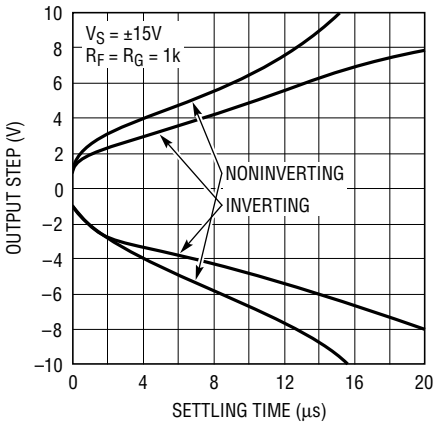


LT1227 • TPC20

Supply Current vs Supply Voltage

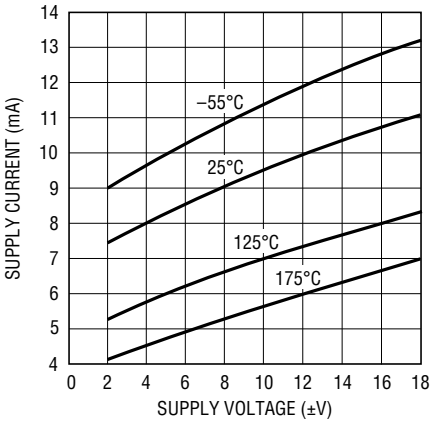


LT1227 • TPC21

Output Impedance in Shutdown vs Frequency

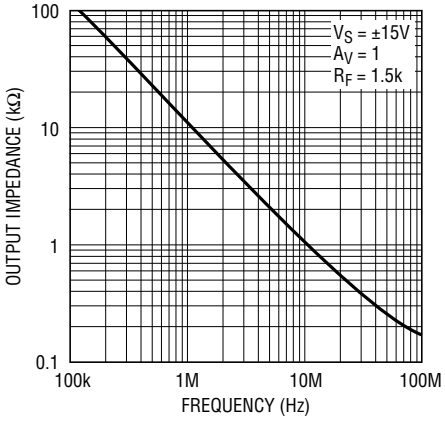


LT1227 • TPC22

Differential Phase vs Frequency

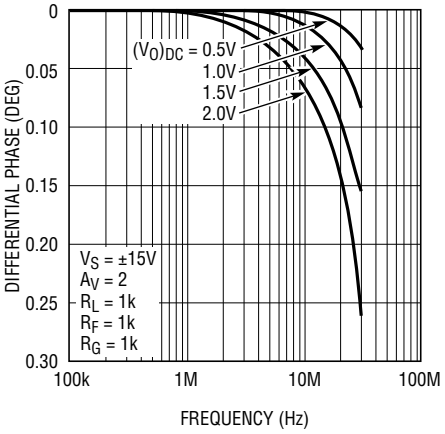


LT1227 • TPC23

Differential Gain vs Frequency

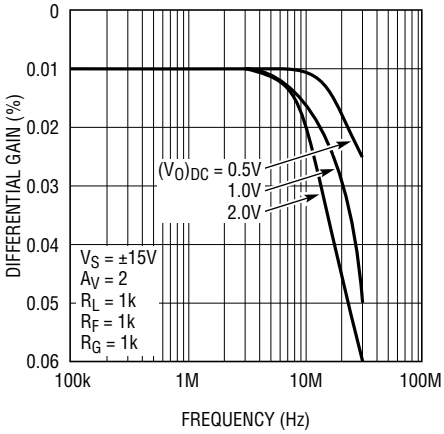


LT1227 • TPC24

2nd and 3rd Harmonic Distortion vs Frequency

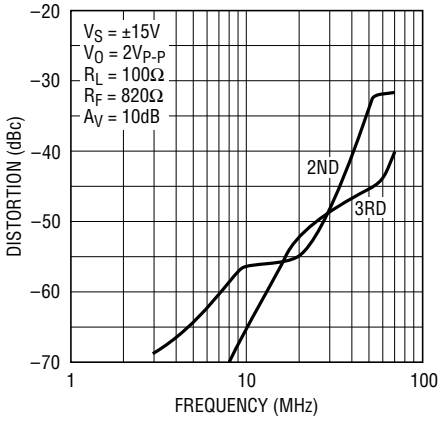


LT1227 • TPC25

3rd Order Intercept vs Frequency

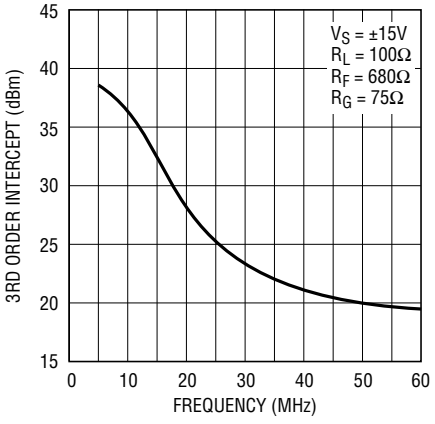


LT1227 • TPC26

Test Circuit for 3rd Order Intercept

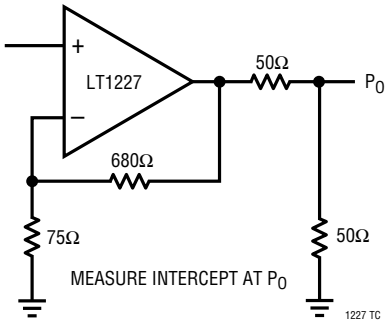

SIMPLIFIED SCHEMATIC

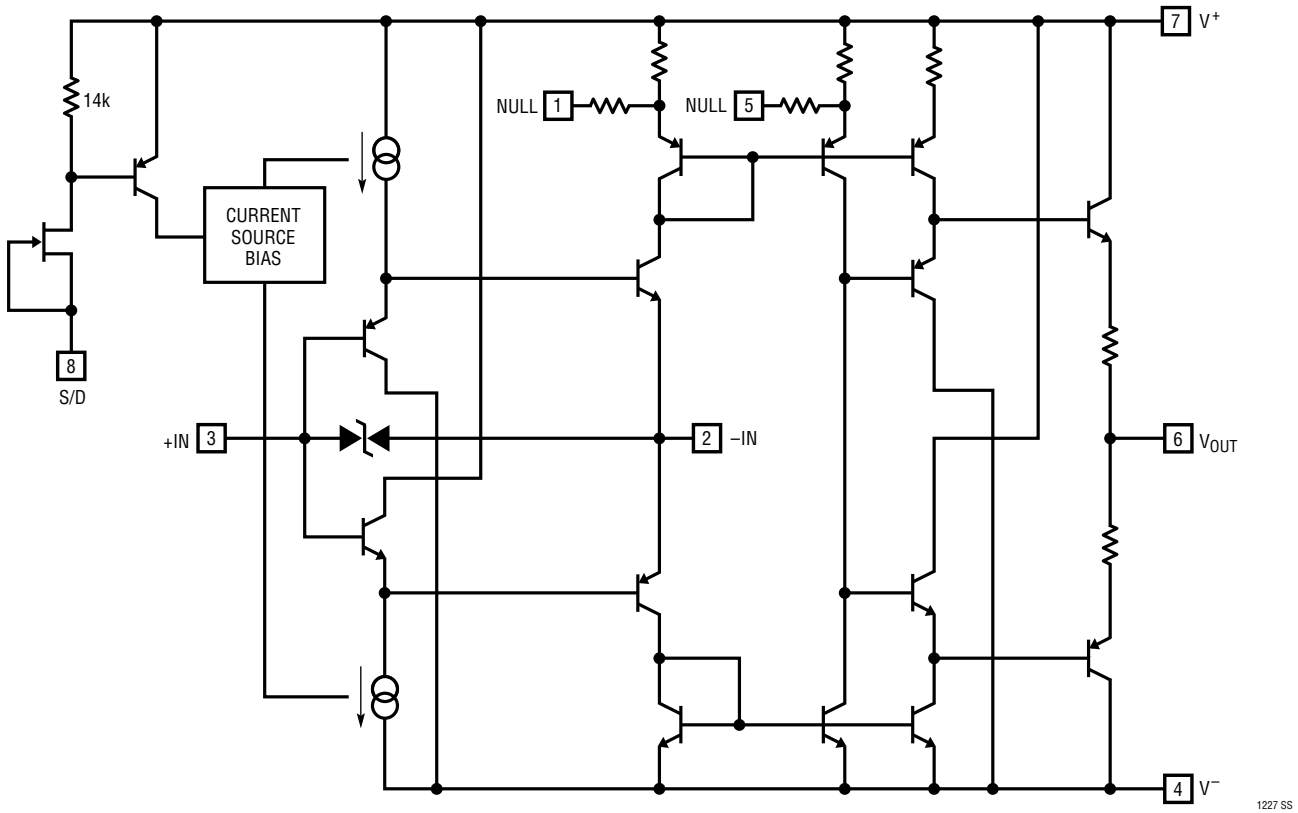

APPLICATIONS INFORMATION

The LT1227 is a very fast current feedback amplifier. Because it is a current feedback amplifier, the bandwidth is maintained over a wide range of voltage gains. The amplifier is designed to drive low impedance loads such as cables with excellent linearity at high frequencies.


Feedback Resistor Selection

The small-signal bandwidth of the LT1227 is set by the external feedback resistors and the internal junction capacitors. As a result, the bandwidth is a function of the supply voltage, the value of the feedback resistor, the closed-loop gain and load resistor. The characteristic curves of Bandwidth vs Supply Voltage show the effect of a heavy load (100Ω) and a light load (1k). These curves use a solid line when the response has less than 0.5dB of peaking and a dashed line when the response has 0.5dB to 5dB of peaking. The curves stop where the response has more than 5dB of peaking.

At a gain of two, on ±15V supplies with a 1k feedback resistor, the bandwidth into a light load is over 140MHz, but into a heavy load the bandwidth reduces to 120MHz. The loading has this effect because there is a mild resonance in the output stage that enhances the bandwidth at light loads but has its Q reduced by the heavy load. This enhancement is only useful at low gain settlings; at a gain of ten it does not boost the bandwidth. At unity gain, the enhancement is so effective the value of the feedback resistor has very little effect. At very high closed-loop gains, the bandwidth is limited by the gain bandwidth product of about 1GHz. The curves show that the bandwidth at a closed-loop gain of 100 is 12MHz, only one tenth what it is at a gain of two.

APPLICATIONS INFORMATION

Small-Signal Rise Time, A_V = +2

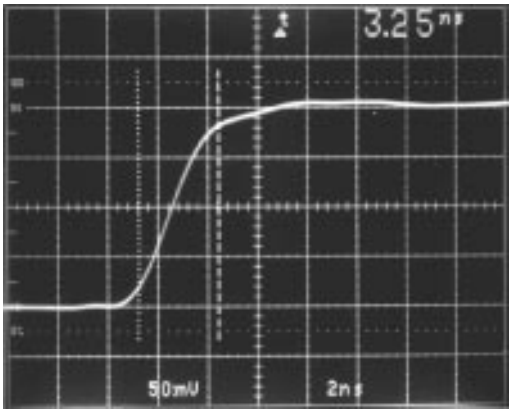

R_F = 1k, R_G= 1k, R_L = 100Ω AI01

Capacitance on the Inverting Input

Current feedback amplifiers require resistive feedback from the output to the inverting input for stable operation. Take care to minimize the stray capacitance between the output and the inverting input. Capacitance on the inverting input to ground will cause peaking in the frequency response (and overshoot in the transient response), but it does not degrade the stability of the amplifier.

Capacitive Loads

The LT1227 can drive capacitive loads directly when the proper value of feedback resistor is used. The graph of Maximum Capacitive Load vs Feedback Resistor should be used to select the appropriate value. The value shown is for 5dB peaking when driving a 1k load at a gain of 2. This is a worst case condition, the amplifier is more stable at higher gains and driving heavier loads. Alternatively, a small resistor (10Ω to 20Ω) can be put in series with the output to isolate the capacitive load from the amplifier output. This has the advantage that the amplifier bandwidth is only reduced when the capacitive load is present and the disadvantage that the gain is a function of the load resistance.

Power Supplies

The LT1227 will operate from single or split supplies from ±2V (4V total) to ±15V (30V total). It is not necessary to use equal value split supplies, however the offset voltage and inverting input bias current will change. The offset voltage changes about 500μV per volt of supply mismatch. The inverting bias current can change as much as 5.0μA per volt of supply mismatch, though typically the change is less than 0.5μA per volt.


Slew Rate

The slew rate of a current feedback amplifier is not independent of the amplifier gain configuration the way slew rate is in a traditional op amp. This is because both the input stage and the output stage have slew rate limitations. In the inverting mode, and for higher gains in the noninverting mode, the signal amplitude between the input pins is small and the overall slew rate is that of the output stage. For gains less than ten in the noninverting mode, the overall slew rate is limited by the input stage.

The input stage slew rate of the LT1227 is approximately 125V/μs and is set by internal currents and capacitances. The output slew rate is set by the value of the feedback resistors and the internal capacitances. At a gain of ten with a 1k feedback resistor and ±15V supplies, the output slew rate is typically 1100V/μs. Larger feedback resistors will reduce the slew rate as will lower supply voltages, similar to the way the bandwidth is reduced.

The graph of Maximum Undistorted Output vs Frequency relates the slew rate limitations to sinusoidal inputs for various gain configurations.


Large-Signal Transient Response, A_V = +10

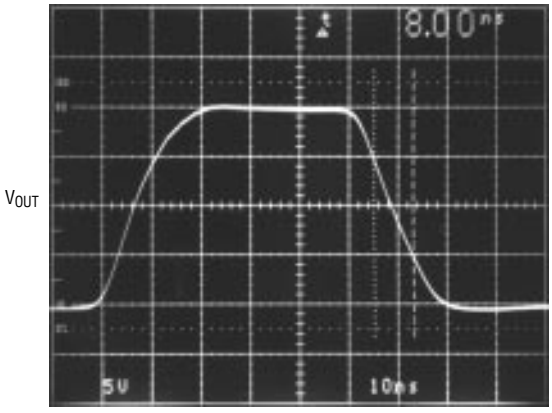

R_F = 910Ω, R_G= 100Ω, R_L = 400Ω AI02

APPLICATIONS INFORMATION

Large-Signal Transient Response, A_V = +2

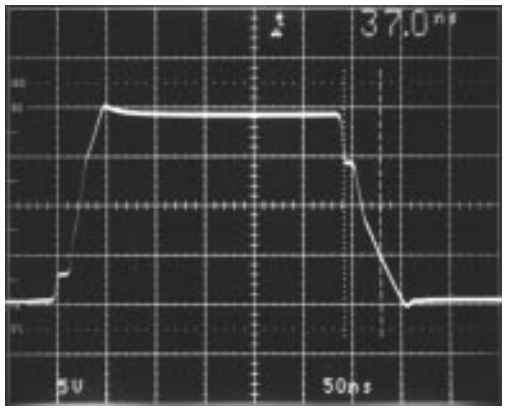


V_{OUT}

R_F = 1k, R_G= 1k, R_L = 400Ω

AI03

Large-Signal Transient Response, A_V = –2

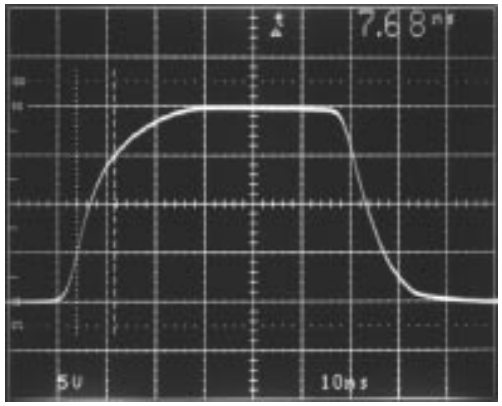

V_{OUT}

R_F = 1k, R_G= 510Ω, R_L = 400Ω

AI04

Settling Time

The characteristic curves show that the LT1227 amplifier settles to within 10mV of final value in 40ns to 55ns for any output step up to 10V. The curve of settling to 1mV of final value shows that there is a slower thermal contribution up to 20μs. The thermal settling component comes from the output and the input stage. The output contributes just under 1mV per volt of output change and the input contributes 300μV per volt of input change. Fortunately the input thermal tends to cancel the output thermal. For this reason the noninverting gain of two configuration settles faster than the inverting gain of one.

Shutdown

The LT1227 has a high impedance, low supply current mode which is controlled by pin 8. In the shutdown mode, the output looks like a 12pF capacitor and the supply current drops to approximately the pin 8 current. The shutdown pin is referenced to the positive supply through an internal pullup circuit (see the simplified schematic). Pulling a current of greater than 50μA from pin 8 will put the device into the shutdown mode. An easy way to force shutdown is to ground pin 8, using open drain (collector) logic. Because the pin is referenced to the positive supply, the logic used should have a breakdown voltage of greater than the positive supply voltage. No other circuitry is necessary as an internal JFET limits the pin 8 current to about 100μA. When pin 8 is open, the LT1227 operates normally.

Differential Input Signal Swing

The differential input swing is limited to about ±6V by an ESD protection device connected between the inputs. In normal operation, the differential voltage between the input pins is small, so this clamp has no effect; however, in the shutdown mode, the differential swing can be the same as the input swing. The clamp voltage will then set the maximum allowable input voltage. To allow for some margin, it is recommended that the input signal be less than ±5V when the device is shutdown.

Offset Adjust

Pins 1 and 5 are provided for offset nulling. A small current to V^+ or ground will compensate for DC offsets in the device. The pins are referenced to the positive supply (see the simplified schematic) and should be left open if unused. The offset adjust pins act primarily on the inverting input bias current. A 10k pot connected to pins 1 and 5 with the wiper connected to V^+ will null out the bias current, but will not affect the offset voltage much. Since the output offset is

$$V_O \cong A_V \bullet V_{OS} + (I_{IN}-) \bullet R_F$$


at higher gains ($A_V > 5$), the V_{OS} term will dominate. To null out the V_{OS} term, use a 10k pot between pins 1 and 5 with a 150k resistor from the wiper to ground for 15V split supplies, 47k for 5V split supplies.

TYPICAL APPLICATIONS


MUX Amplifier

The shutdown function can be effectively used to construct a MUX amplifier. A two-channel version is shown, but more inputs could be added with suitable logic. By configuring each amplifier as a unity-gain follower, there is no loading by the feedback network when the amplifier is off. The open drains of the 74C906 buffers are used to interface the 5V logic to the shutdown pin. Feedthrough from the unselected input to the output is –70dB at 10MHz. The differential voltage between MUX inputs V_{IN1} and V_{IN2} appears across the inputs of the shutdown device, this voltage should be less than ±5V to avoid turning on the clamp diodes discussed previously. If the inputs are sinusoidal having a zero DC level, this implies that the amplitude of each input should be less than $5V_{P-P}$. The output impedance of the off amplifier remains high until the output level exceeds approximately $6V_{P-P}$ at 10MHz, this sets the maximum usable output level. Switching time between inputs is about 4µs without an external pullup. Adding a 10k pullup resistor from each shutdown pin to V^+ will reduce the switching time to 2µs but will increase the positive supply current in shutdown by 1.5mA.

MUX Amplifier

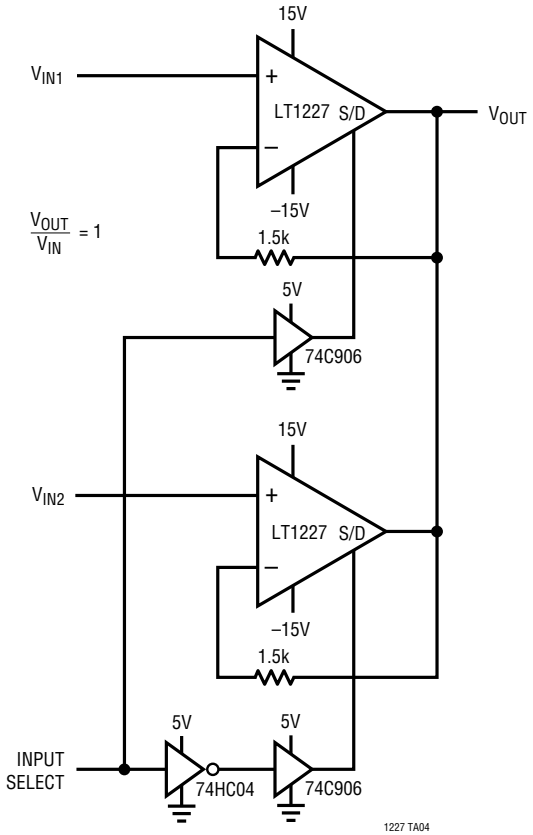


MUX Output

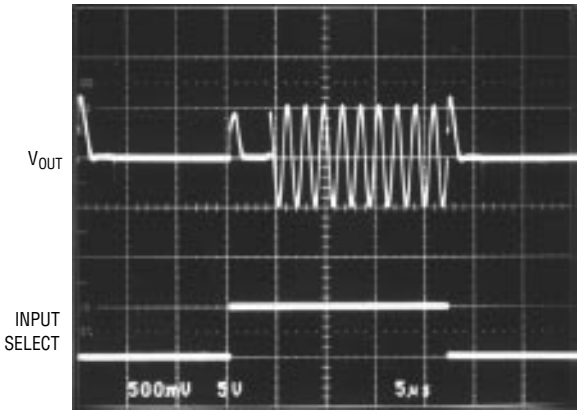


$V_{IN1} = 1V_{P-P}$, $V_{IN2} = 0V$

MUX Input Crosstalk vs Frequency

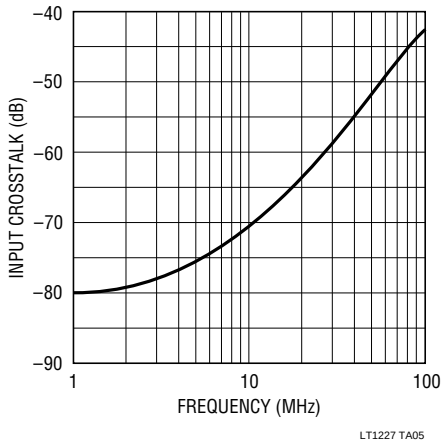


TYPICAL APPLICATIONS


Single Supply AC-Coupled Amplifier Noninverting

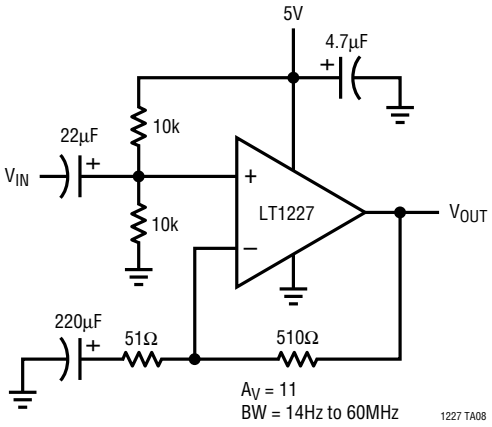


Single Supply AC-Coupled Amplifier Inverting

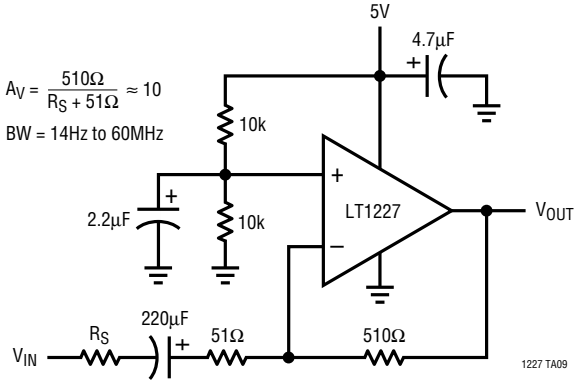


3.58MHz Oscillator

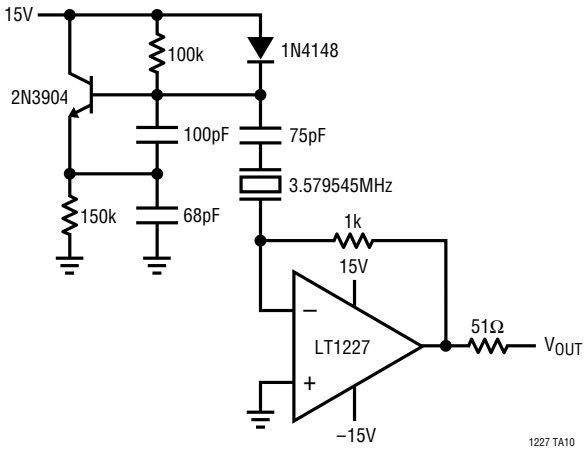


Buffer with DC Nulling Loop

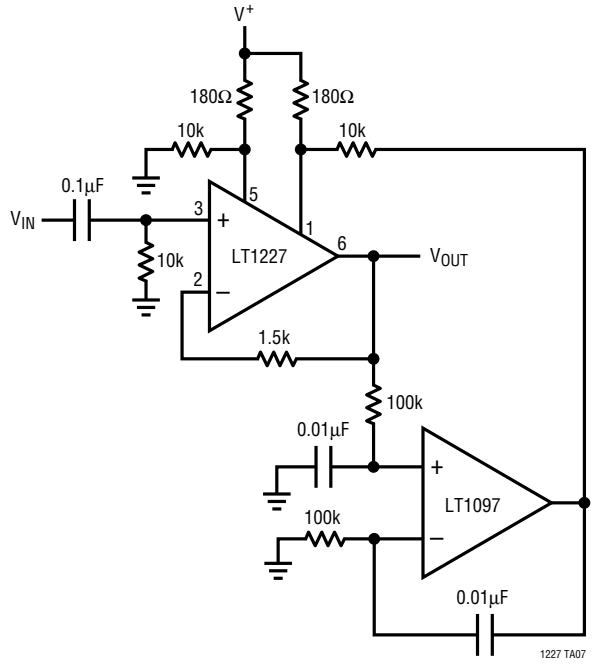

CMOS Logic to Shutdown Interface

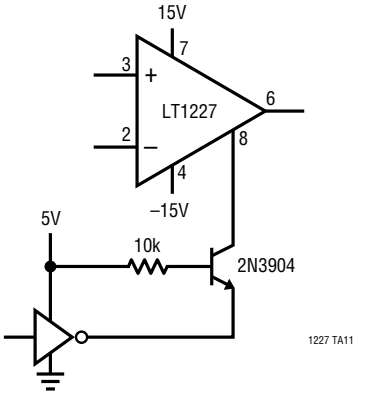


Optional Offset Nulling circuit

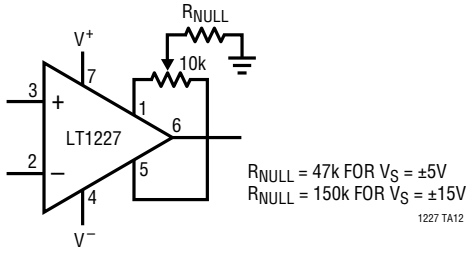

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

PACKAGE DESCRIPTION


J8 Package
8-Lead Ceramic DIP

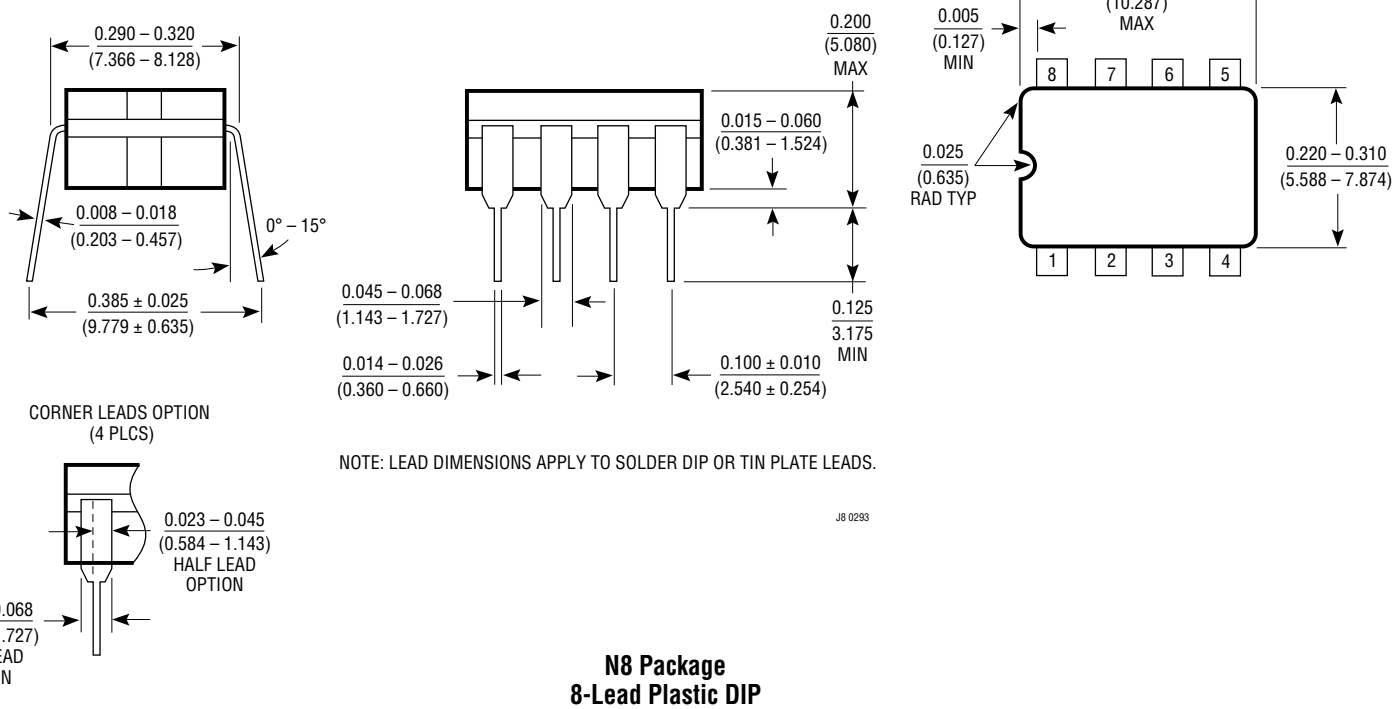

NOTE: LEAD DIMENSIONS APPLY TO SOLDER DIP OR TIN PLATE LEADS.


J8 0293

N8 Package
8-Lead Plastic DIP

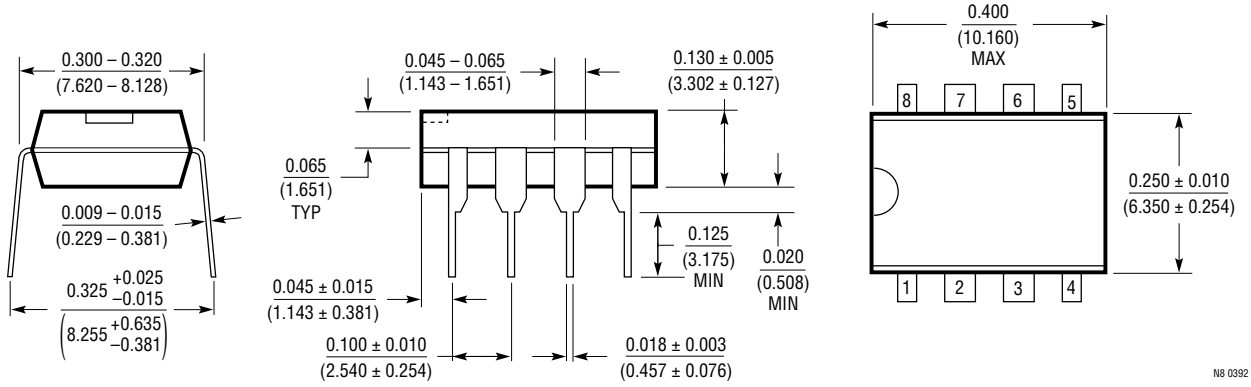

N8 0392

S8 Package
8-Lead Plastic SOIC

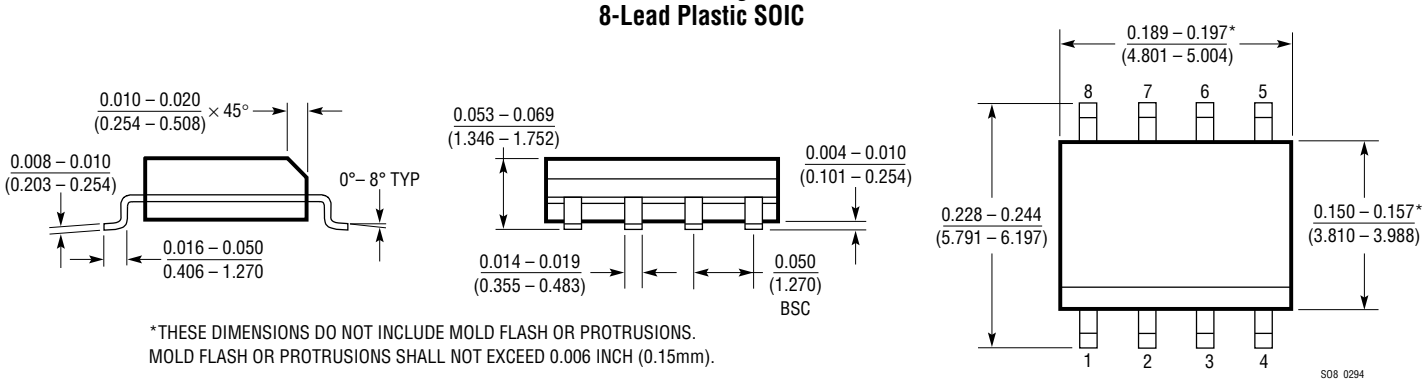

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.006 INCH (0.15mm).

SO8 0294

Linear Technology Corporation
1630 McCarthy Blvd., Milpitas, CA 95035-7487
(408) 432-1900 • FAX: (408) 434-0507 • TELEX: 499-3977

LT/GP 0394 5K REV A

© LINEAR TECHNOLOGY CORPORATION 1994